




SMA Male to SMB Female, Adapter, RA04S03 DC-4GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

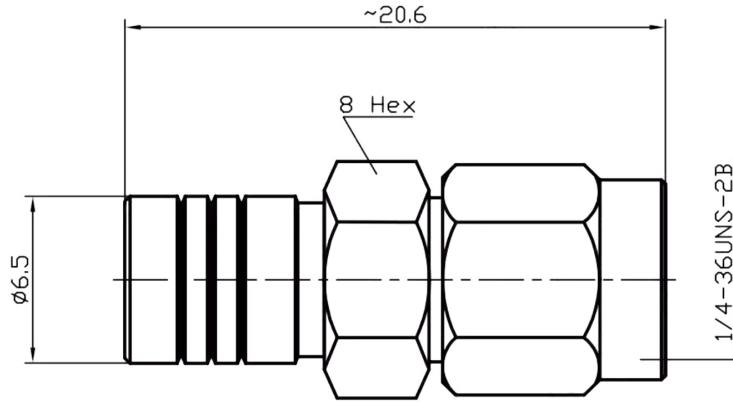

Electrical & Environmental

Frequency Range	DC-4GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-45°C to +125°C
Insertion Loss	0.20dB max		

Mechanical & Product Information

Product Number	RA04S03, E-Grade	Connector	SMA Male to SMB Female
Connector Body	Passivated stainless steel & Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE