




SMA Female to SMB Female, Adapter, **RA04S14-GBA**
DC-4GHz, Straight

Dimensions(mm) Tolerance±1%

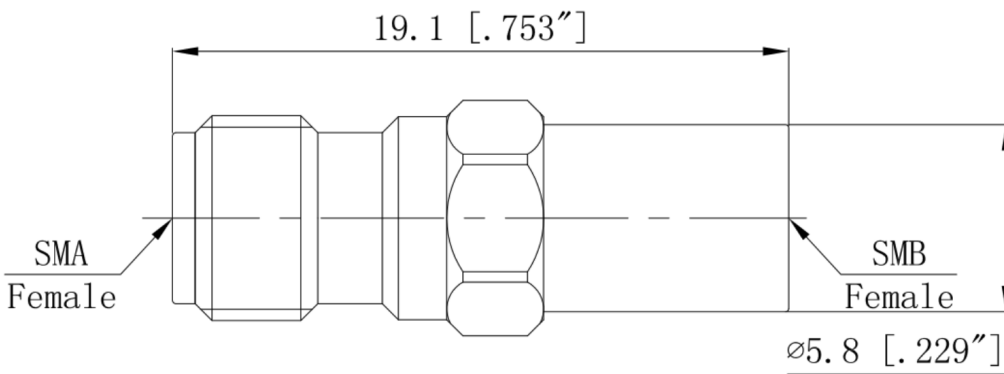

Electrical & Environmental

Frequency Range	DC-4GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +125°C

Mechanical & Product Information

Product Number	RA04S14-GBA, E-Grade	Connector	SMA Female to SMB Female
Connector Body	Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE