


TRB Male to TRB Female, Adapter, RA05TRB03T DC-0.5GHzTee,

Dimensions(mm) Tolerance $\pm 1\%$

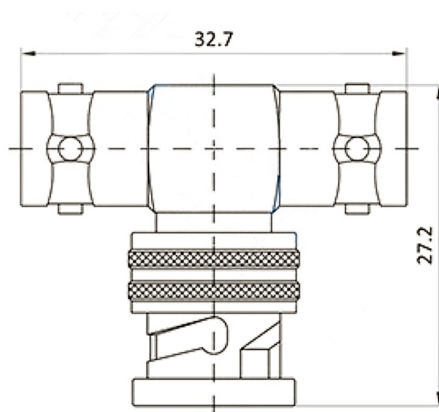

Electrical & Environmental

Frequency Range	DC-0.5GHz	Impedance	50 ohm
VSWR	max	Insertion Loss	-
Mating Cycles	>500 Cycles	OT Range	-45°C to +125°C

Mechanical & Product Information

Product Number	RA05TRB03T, E-Grade	Connector	TRB Male to TRB Female
Connector Body	Nickel plated brass	Shape/Mounting	Tee, None
Center Contact	Gold plated brass	Insulator	PTFE
Dimension	32.7(L)×27.2(W)mm	Net Weight	-