




BNC Male to SMA Female, Adapter, RA06B07 DC-6GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

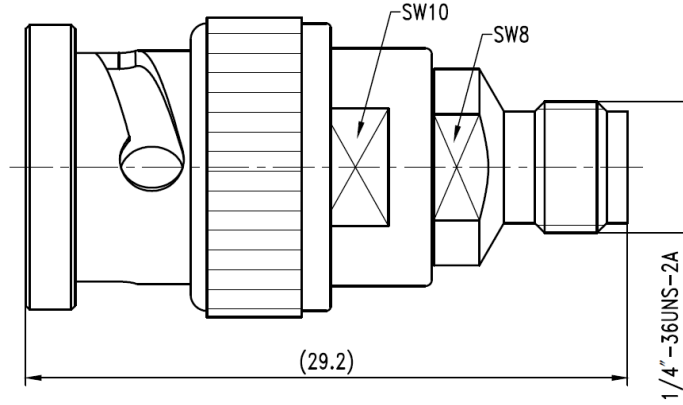

Electrical & Environmental

| | | | |
|-----------------|---------|----------------|-----------------|
| Frequency Range | DC-6GHz | Impedance | 50 ohm |
| VSWR | 1.2 max | Operating Temp | -55°C to +165°C |

Mechanical & Product Information

| | | | |
|----------------|--|----------------|------------------------|
| Product Number | RA06B07, JP-Grade | Connector | BNC Male to SMA Female |
| Connector Body | Passivated stainless steel 316F & BeCu | Shape/Mounting | Straight, None |
| Center Contact | 1.27um gold plated beryllium copper | Insulator | PEI&PTFE |

Typical Test Data

