




Right Angle Waveguide to Coaxial Adapter, RWR28K02

26.3-40GHz, WR28 to 2.92mm Female, UBR320 Flange

Dimensions(mm) Tolerance $\pm 1\%$

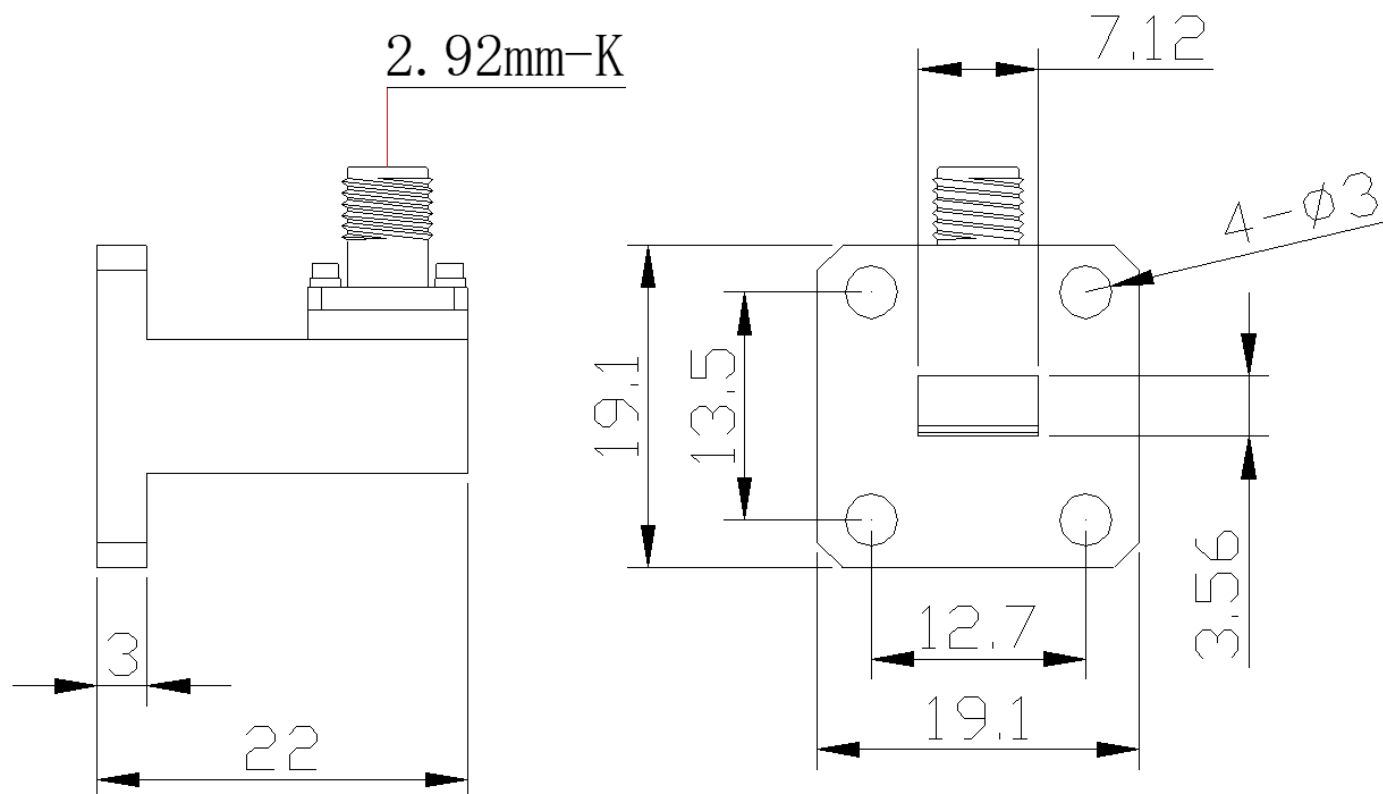

Electrical & Environmental

Frequency Range	26.3-40GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	10W @25°C	Peak Power	1000W	Insertion Loss	00.25 dB max

Mechanical & Product Information

Product Number	RWR28K02, E-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum	Waveguide	WR28, UBR320 Flange
Connector Body	Passivated stainless steel	Coax Connector	2.92mm(K,SK) Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-30°C to 70°C	Net Weight	About 12.8g



Right Angle Waveguide to Coaxial Adapter, **RWR28K02** 26.3-40GHz, WR28 to 2.92mm(K,SK) Female, UBR320 Flange

Typical Test Data

