




Right Angle Waveguide to Coaxial Adapter, RWR34KU 21.7-33GHz, WR34 to 2.92mm Female,

Dimensions(mm) Tolerance $\pm 1\%$

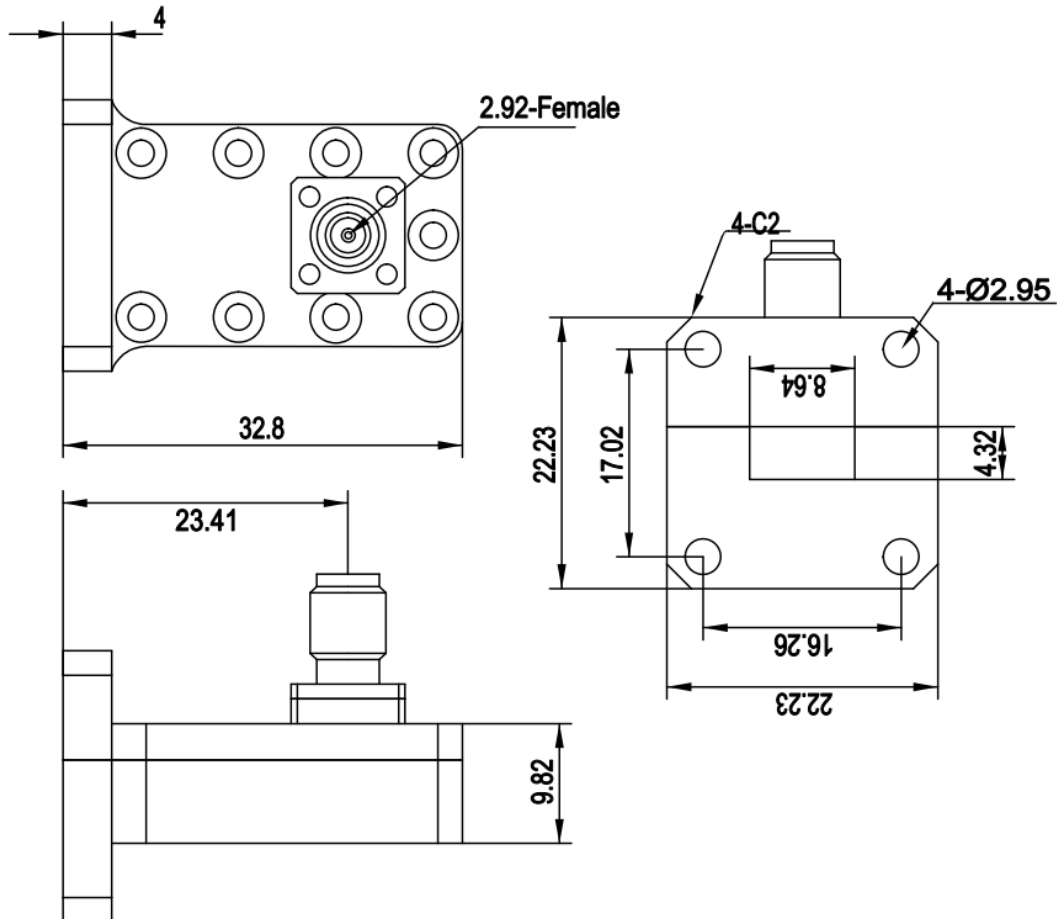

Electrical & Environmental

Frequency Range	21.7-33GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	10W @25°C	Peak Power	1000W	Insertion Loss	0.35 dB max

Mechanical & Product Information

Product Number	RWR34KU, H-Grade	Body Geometry	Right Angle
Waveguide Body	Copper, grey painted	Waveguide	WR34,
Connector Body	Passivated stainless steel	Coax Connector	2.92mm(K,SK) Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-



Right Angle Waveguide to Coaxial Adapter, **RWR34KU**
21.7-33GHz, WR34 to 2.92mm(K,SK) Female,

Typical Test Data

