


SMA Female to SMA Female, Adapter, RA06S01-GBA DC-6GHz



Dimensions(mm) Tolerance $\pm$ 1%

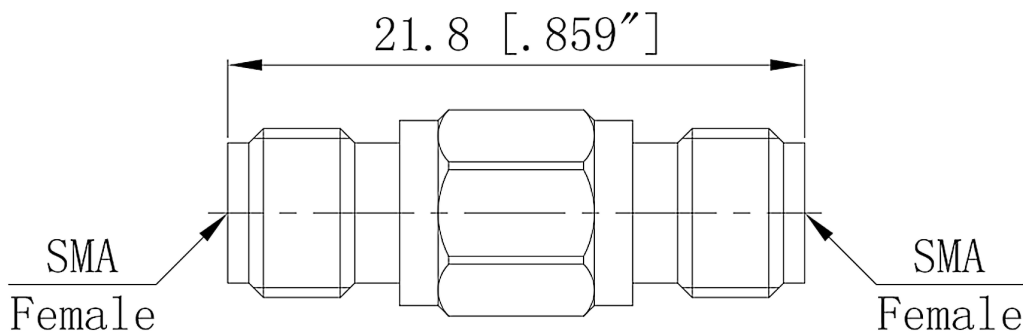

Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	-
Mating Cycles	>500 Cycles	OT Range	-55°C to +165°C

Mechanical & Product Information

Product Number	RA06S01-GBA, E-Grade	Connector	SMA Female to SMA Female
Connector Body	Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	21.8(L)mm	Net Weight	About 3.5g

Typical Test Data

