




Right Angle Waveguide to Coaxial Adapter, **RWR62N** 11.9-18GHz, WR62 to N Female, UBR140 Flange

Dimensions(mm) Tolerance $\pm 1\%$

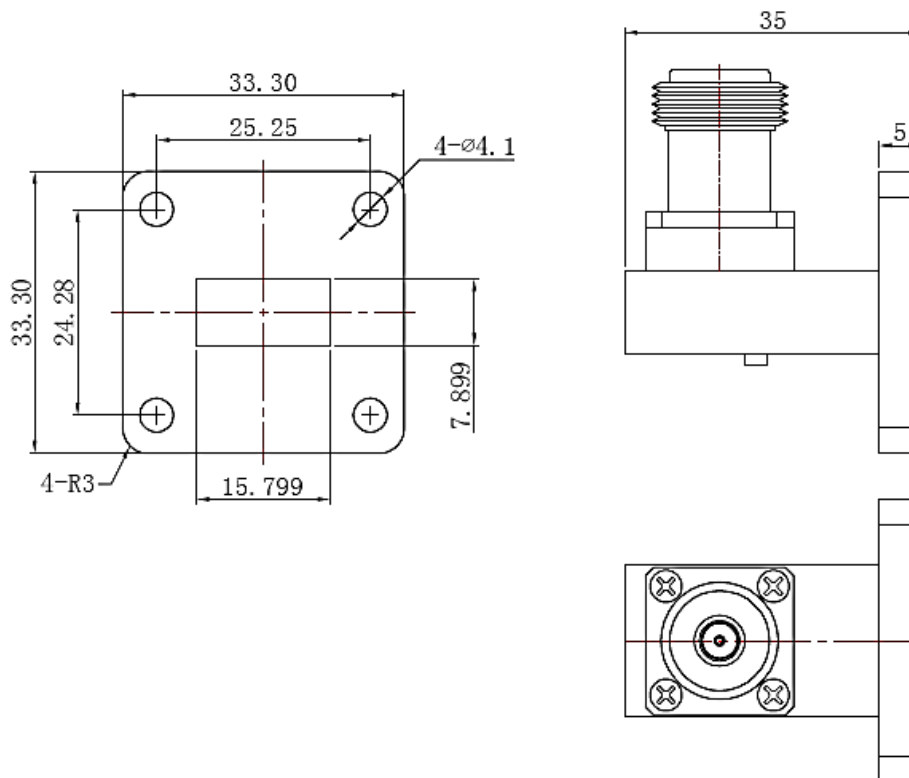

Electrical & Environmental

Frequency Range	11.9-18GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	100W @25°C	Peak Power	2000W	Insertion Loss	0.35 dB max

Mechanical & Product Information

Product Number	RWR62N, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR62, UBR140 Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 61.5g



Right Angle Waveguide to Coaxial Adapter, **RWR62N** 11.9-18GHz, WR62 to N Female, UBR140 Flange

Typical Test Data

