




End Launch Waveguide to Coaxial Adapter, **RWR62SE** 11.9-18GHz, WR62 to SMA Female, UBR140 Flange

Dimensions(mm) Tolerance $\pm 1\%$

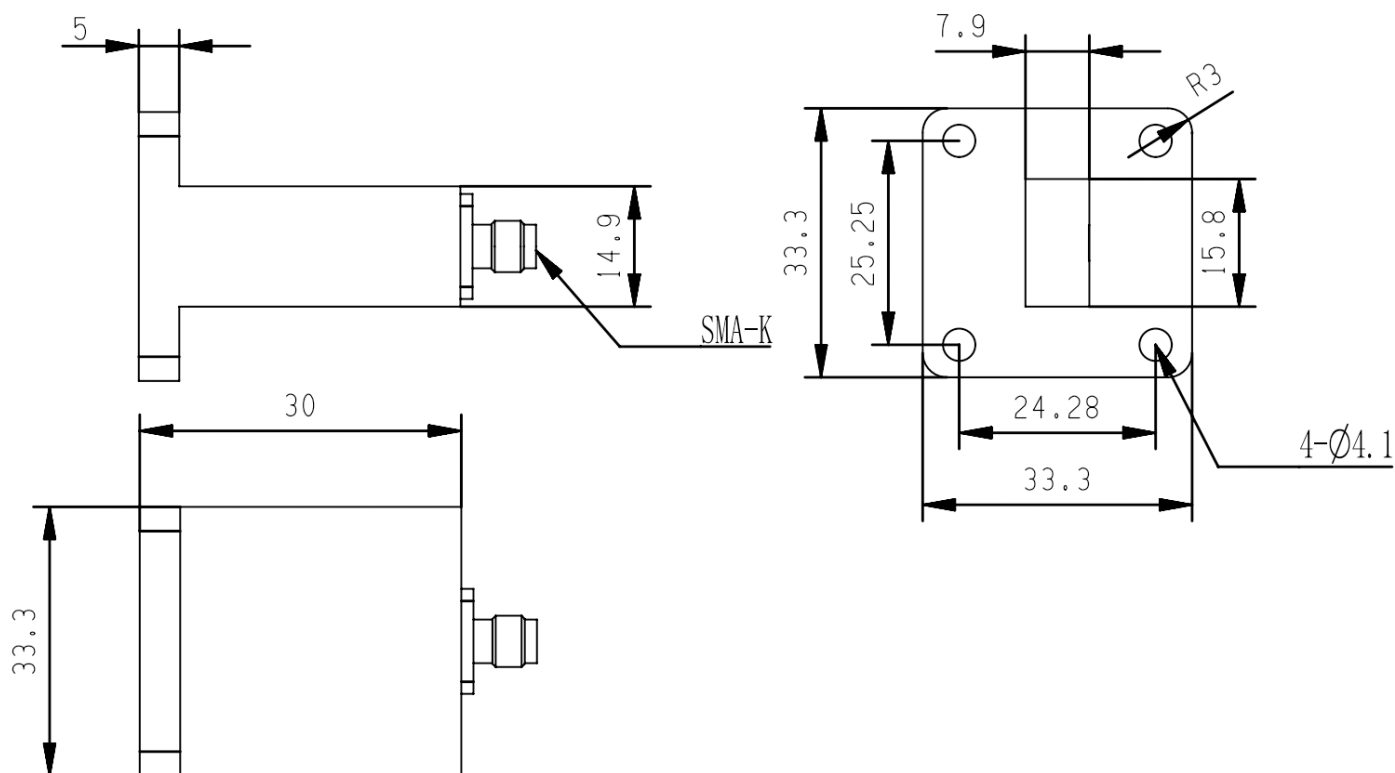

Electrical & Environmental

Frequency Range	11.9-18GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	50W @25°C	Peak Power	2000W	Insertion Loss	0.3 dB max

Mechanical & Product Information

Product Number	RWR62SE, H-Grade	Body Geometry	End Launch
Waveguide Body	Aluminum, grey painted	Waveguide	WR62, UBR140 Flange
Connector Body	Passivated stainless steel	Coax Connector	SMA Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 40.0g



End Launch Waveguide to Coaxial Adapter, **RWR62SE** 11.9-18GHz, WR62 to SMA Female, UBR140 Flange

Typical Test Data

