


End Launch Waveguide to Coaxial Adapter, **RWR6DE** 114-145GHz, WR6 to 0.8mm Female, FUGP1400 Flange

Dimensions(mm) Tolerance $\pm 1\%$

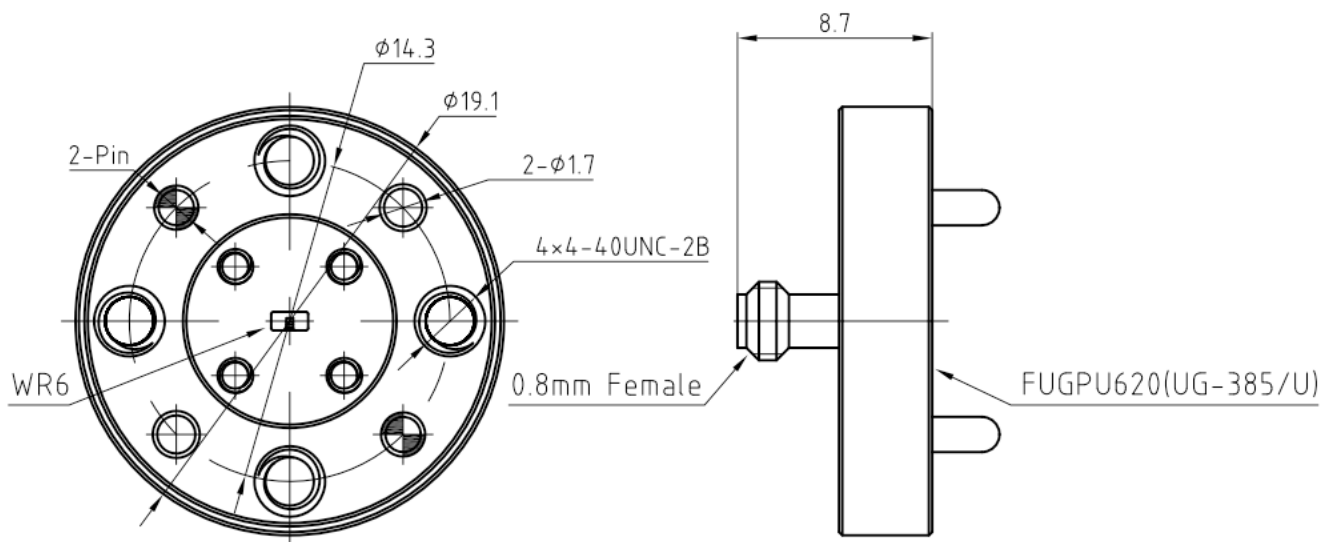

Electrical & Environmental

Frequency Range	114-145GHz	Impedance	50 ohm	VSWR	1.8 max
Input Avg Power	00.5W @25°C	Peak Power	-	Insertion Loss	1.8 dB max

Mechanical & Product Information

Product Number	RWR6DE, P-Grade	Body Geometry	End Launch
Waveguide Body	Copper, gold plated	Waveguide	WR6, FUGP1400 Flange
Connector Body	Passivated stainless steel	Coax Connector	0.8mm Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 85°C	Net Weight	-