




**SMA Male to SMB Male, Adapter, RA06S06-GBA**  
DC-6GHz, Straight

Dimensions(mm) Tolerance±1%

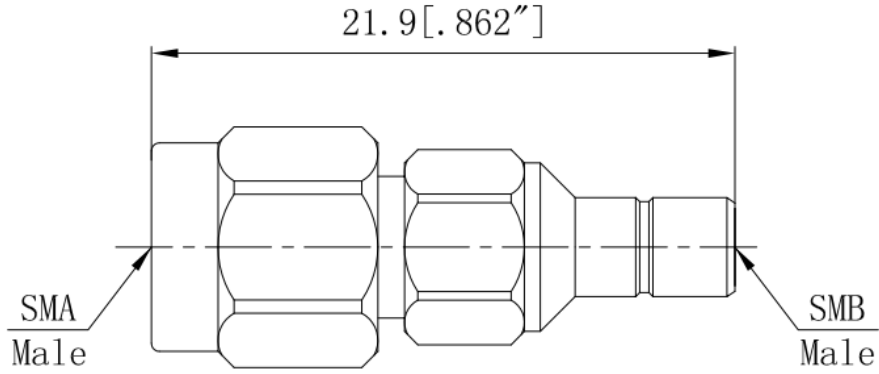

**Electrical & Environmental**

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +165°C

**Mechanical & Product Information**

Product Number	RA06S06-GBA, E-Grade	Connector	SMA Male to SMB Male
Connector Body	Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE

**Typical Test Data**

