


## SMA Female to LBMP Male, Adapter, RA06S11 DC-6GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

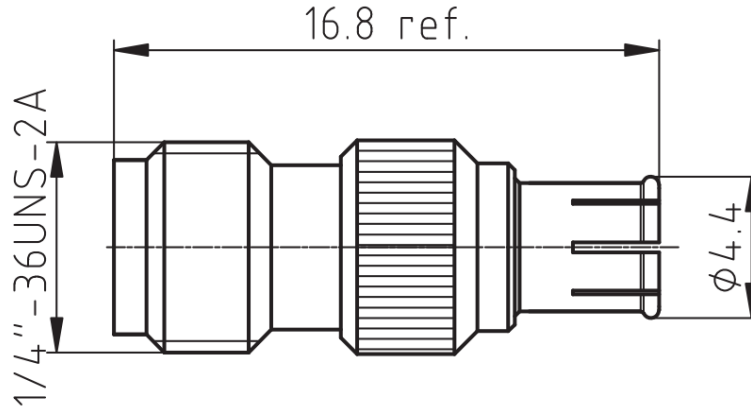

### Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C

### Mechanical & Product Information

Product Number	RA06S11, E-Grade	Connector	SMA Female to LBMP Male
Connector Body	Gold plated brass/BeCu	Shape/Mounting	Straight, None
Center Contact	Bronze/Brass,Gold plating	Insulator	PTFE

