


End Launch Double Ridge Waveguide to Coax Adapter, RWRD750NE 7.5-18GHz, WRD750 to N Female, FPWRD750 Flange

Dimensions(mm) Tolerance $\pm 1\%$

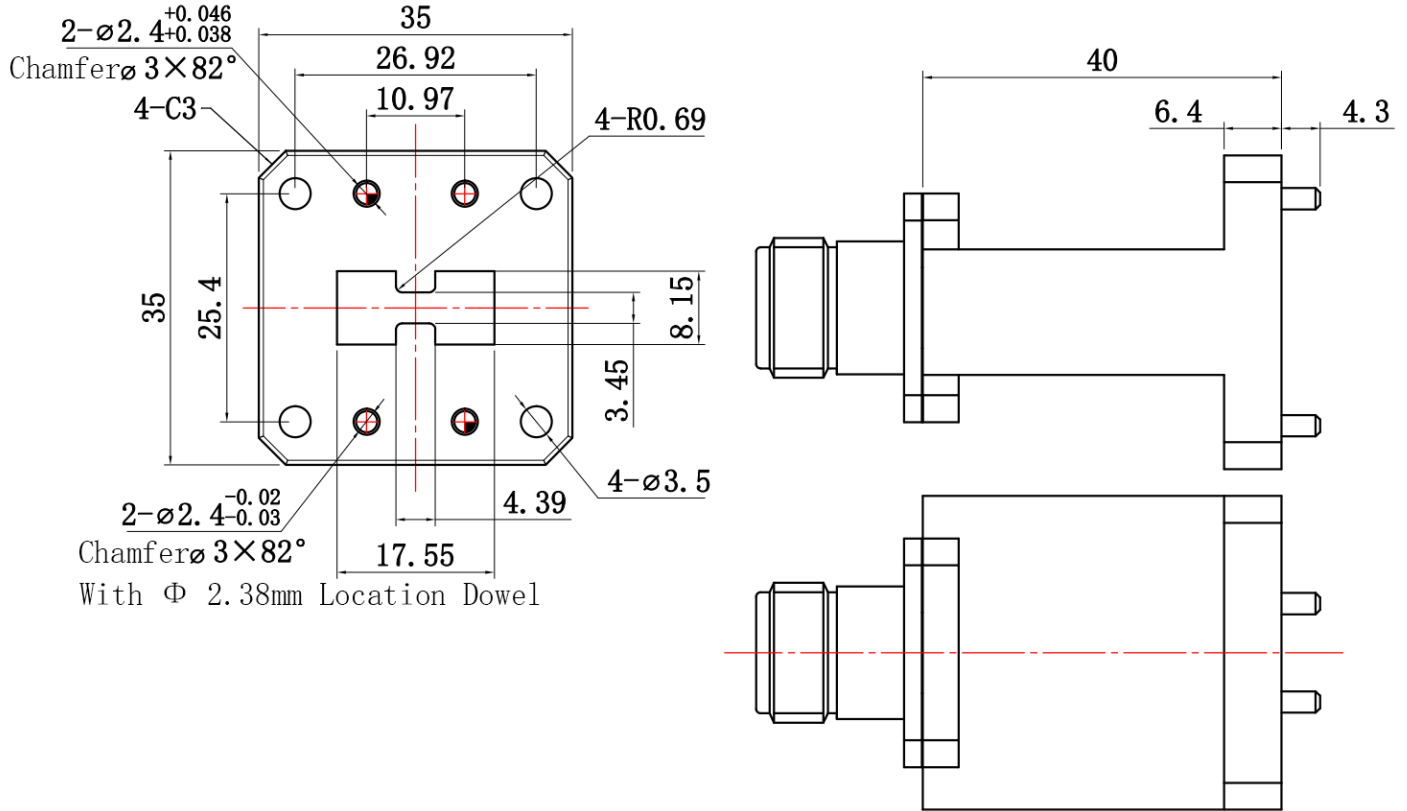

Electrical & Environmental

Frequency Range	7.5-18GHz	Impedance	50 ohm	VSWR	1.3 max
Input Avg Power	200W @25°C	Peak Power	5000W	Insertion Loss	0.7 dB max

Mechanical & Product Information

Product Number	RWRD750NE, H-Grade	Body Geometry	End Launch
Waveguide Body	Aluminum, grey painted	Waveguide	WRD750, FPWRD750 Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-

End Launch Double Ridge Waveguide to Coax Adapter, RWRD750NE 7.5-18GHz, WRD750 to N Female, FPWRD750 Flange

Typical Test Data

