




## SMA Male to MMCX Male, Adapter, RA06S18 DC-6GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

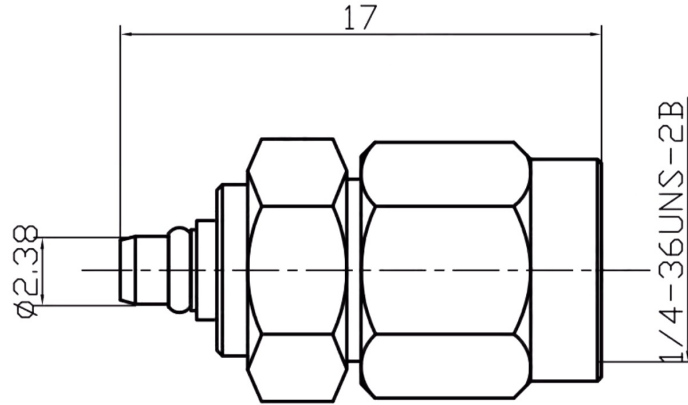

### Electrical & Environmental

Frequency Range	DC-6GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-45°C to +125°C
Insertion Loss	0.20dB max		

### Mechanical & Product Information

Product Number	RA06S18, E-Grade	Connector	SMA Male to MMCX Male
Connector Body	Passivated stainless steel & Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE

### Typical Test Data

