




## SC Male to SC Female, Adapter, RA11C03 DC-11GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

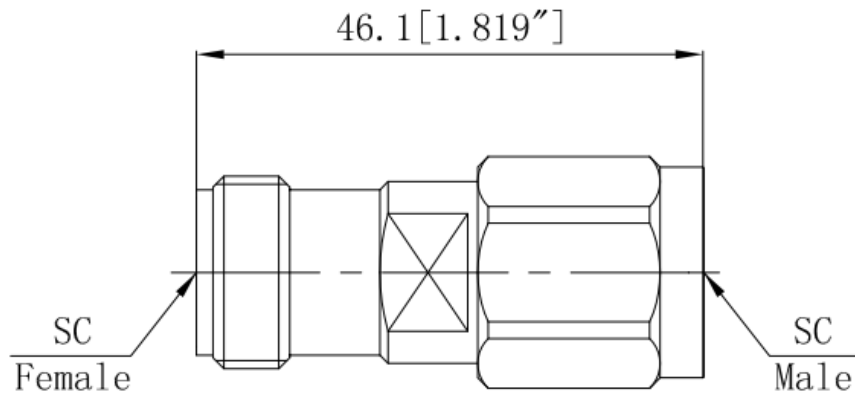

### Electrical & Environmental

Frequency Range	DC-11GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.20dB max		

### Mechanical & Product Information

Product Number	RA11C03, H-Grade	Connector	SC Male to SC Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE

### Typical Test Data

