


WR19(BJ500) 2 Way Waveguide Magic Tee, RWMT19

39.2-59.6GHz, W, UG-383/U Flange

Dimensions(mm) Tolerance $\pm 1\%$

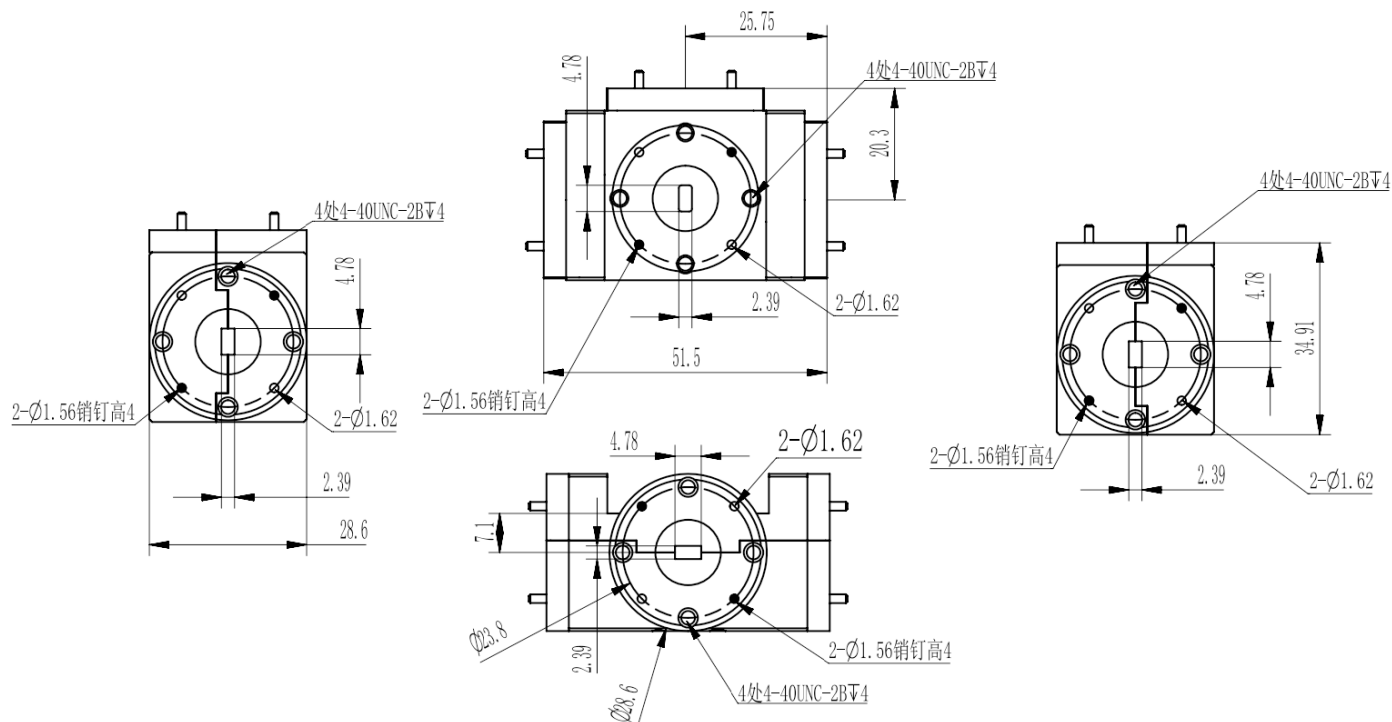

Electrical & Environmental

Frequency Range	39.2-59.6GHz	Impedance	50 Ohm
Input Port VSWR	1.3 Max	Output Port VSWR	1.3 Max
Insertion Loss	0.25dB Max		
Isolation	20dB min		
Operating Temp	-40°C ~ +70°C		

Mechanical & Product Information

Product Number	RWMT19	Way	2
Waveguide	WR19(BJ500), UG-383/U Flange	Waveguide Body	Copper, gold plated
Center Contact	Copper, gold plated		
Housing	Gold plated		
Dimensions	51.5×34.91×28.6mm	Net Weight	-

WR19(BJ500) 2 Way Waveguide Magic Tee, RWMT19 39.2-59.6GHz, W, UG-383/U Flange

Typical Test Data

