




SMP(GPO) Female to SMP(GPO) Female, Adapter, RA12P01H-GBC DC-12.4GHz

Dimensions(mm) Tolerance $\pm 1\%$

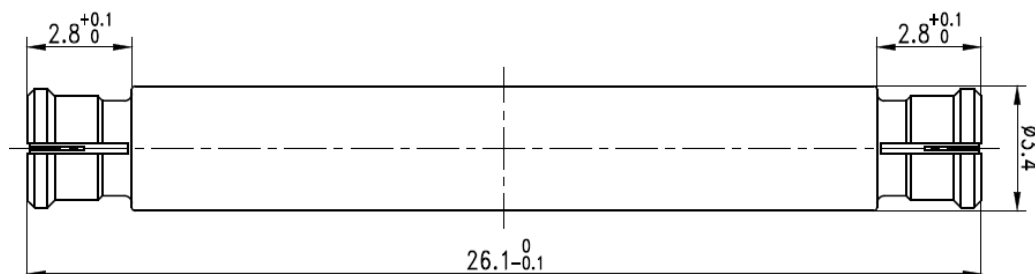

Electrical & Environmental

Frequency Range	DC-12.4GHz	Impedance	50 ohm
VSWR	1.2 max	Insertion Loss	0.30dB max $\leq 0.1\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA12P01H-GBC, U-Grade	Connector	SMP(GPO) Female to SMP(GPO) Female
Connector Body	Gold plated beryllium copper	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	26.1(L)*3.4(ϕ)mm	Net Weight	About 1.3g

Typical Test Data

