


Right Angle Waveguide to Coaxial Adapter, **RWR112S** 6.57-9.99GHz, WR112 to SMA Female, UBR84 Flange

Dimensions(mm) Tolerance $\pm 1\%$

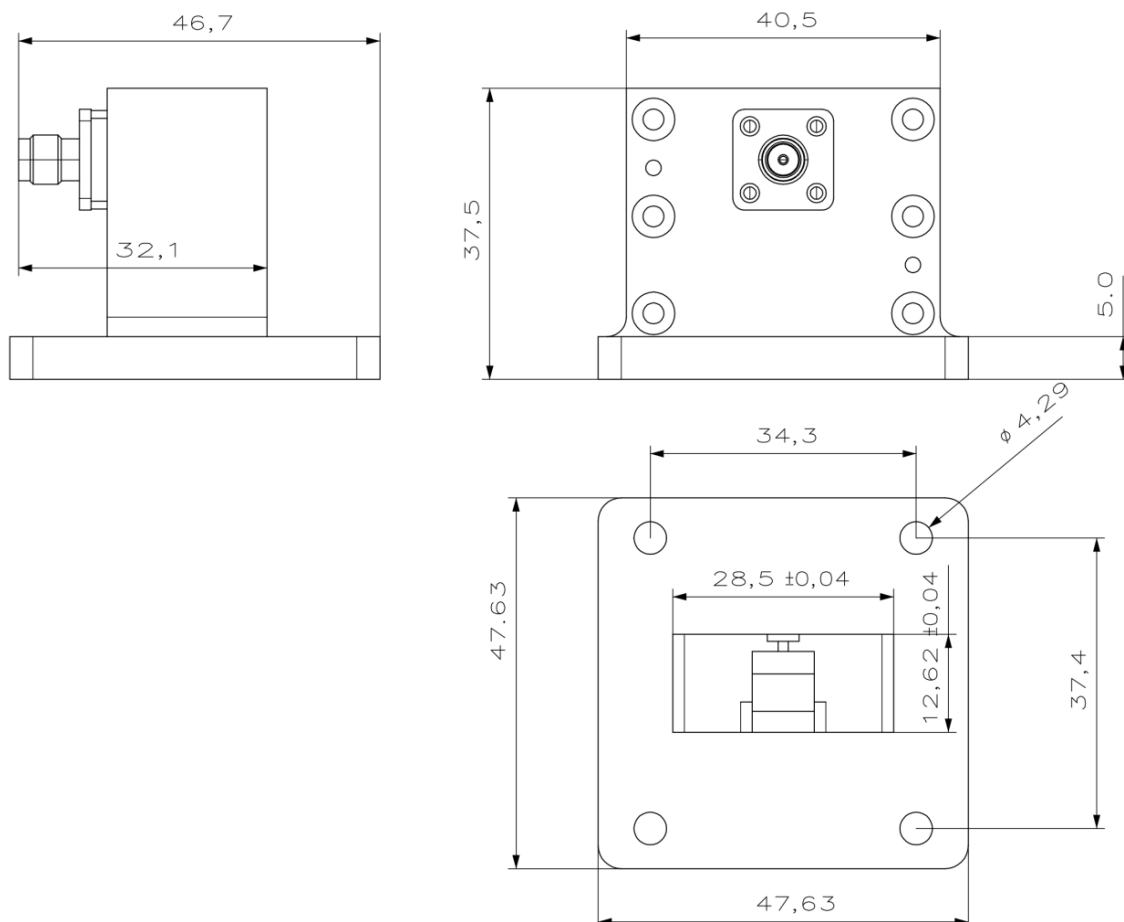


Electrical & Environmental

Frequency Range	6.57-9.99GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	50W @25°C	Peak Power	2000W	Insertion Loss	0.2 dB max

Mechanical & Product Information

Product Number	RWR112S, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR112, UBR84 Flange
Connector Body	Passivated stainless steel	Coax Connector	SMA Female
Center Contact	1.27 μ m Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 76.8g



Right Angle Waveguide to Coaxial Adapter, **RWR112S** 6.57-9.99GHz, WR112 to SMA Female, UBR84 Flange

Typical Test Data

