


SMA Female to BMA Female, Adapter, RA12S01 DC-12GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

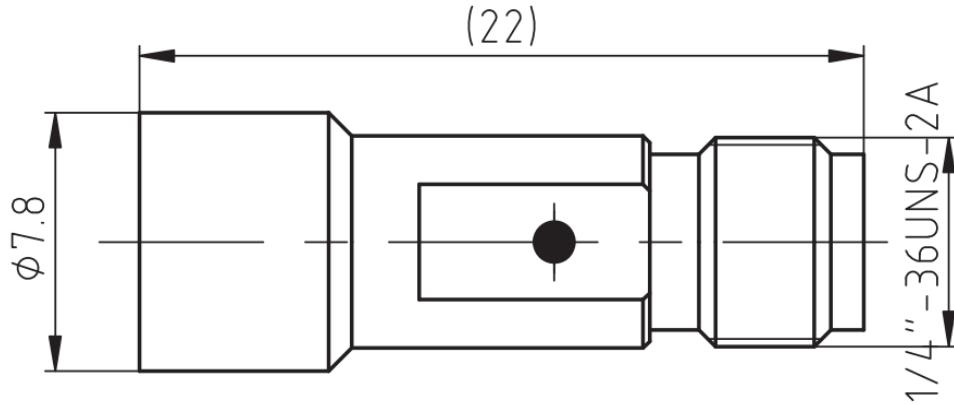

Electrical & Environmental

| | | | |
|------------------------|----------|-----------------------|-----------------|
| Frequency Range | DC-12GHz | Impedance | 50 ohm |
| VSWR | 1.25 max | Operating Temp | -55°C to +165°C |

Mechanical & Product Information

| | | | |
|-----------------------|---------------------------------|-----------------------|--------------------------|
| Product Number | RA12S01, E-Grade | Connector | SMA Female to BMA Female |
| Connector Body | Ternary alloy plated brass/BeCu | Shape/Mounting | Straight, None |
| Center Contact | BeCu/Brass,Gold plating | Insulator | PTFE |