


Right Angle Waveguide to Coaxial Adapter, **RWR1150D** 0.64-0.98GHz, WR1150 to L29 Female, UDR8 Flange

Dimensions(mm) Tolerance $\pm 1\%$

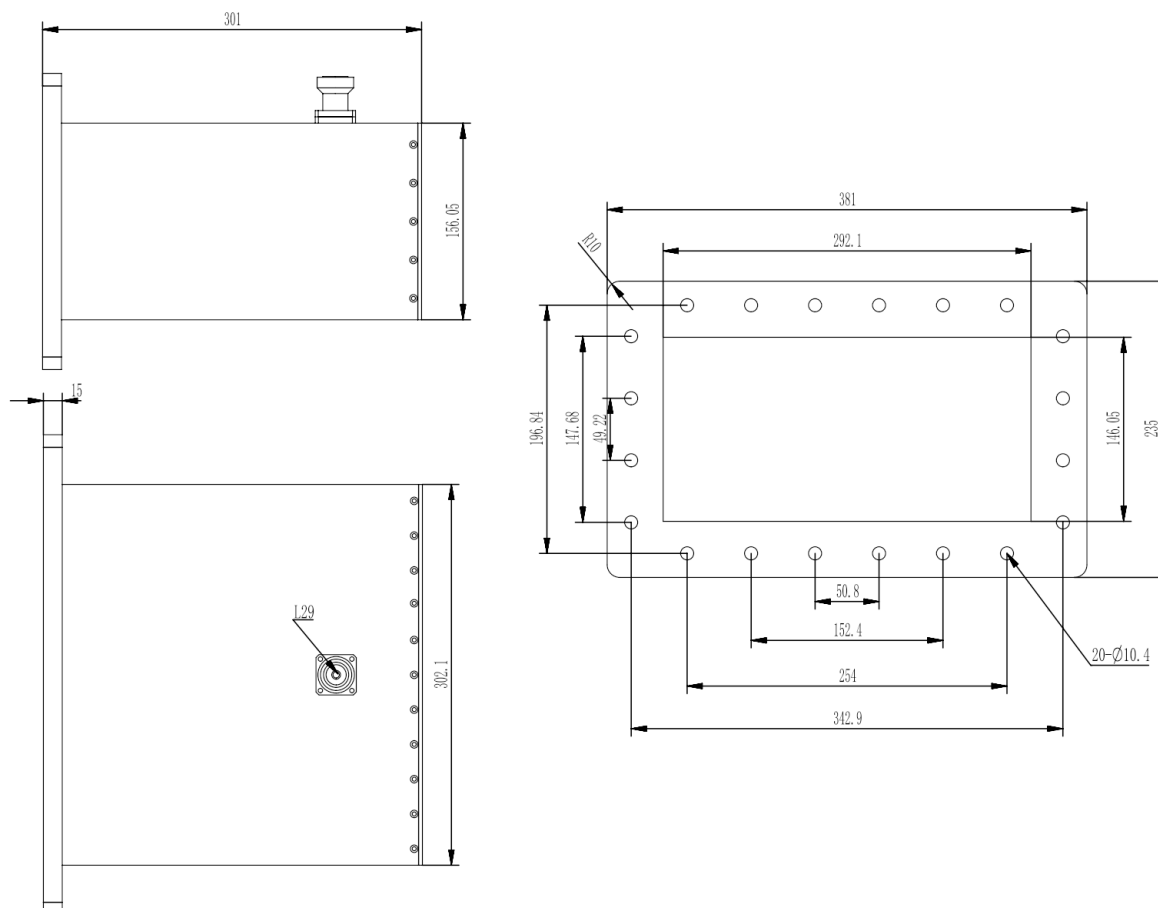

Electrical & Environmental

Frequency Range	0.64-0.98GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	2000W @25°C	Peak Power	-	Insertion Loss	00.3 dB max

Mechanical & Product Information

Product Number	RWR1150D, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR1150, UDR8 Flange
Connector Body	Nickel plated brass	Coax Connector	L29(DIN 7/16) Female
Center Contact	Silver plated phosphor bronze		
Operating Temp	-40°C to 70°C	Net Weight	-