




## SMA Female to SSMC Female, Adapter, RA12S03-GBA DC-12GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

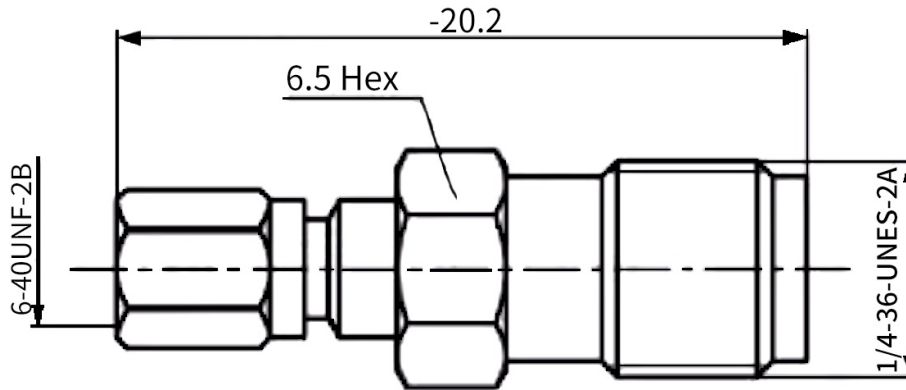

### Electrical & Environmental

Frequency Range	DC-12GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-45°C to +125°C
Insertion Loss	0.20dB max		

### Mechanical & Product Information

Product Number	RA12S03-GBA, E-Grade	Connector	SMA Female to SSMC Female
Connector Body	Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated phosphor bronze	Insulator	PTFE