


Right Angle Waveguide to Coaxial Adapter, RWR151 WR15 to 1.0mm Female, FUGP620 Circular Flange

Dimensions(mm) Tolerance $\pm 1\%$

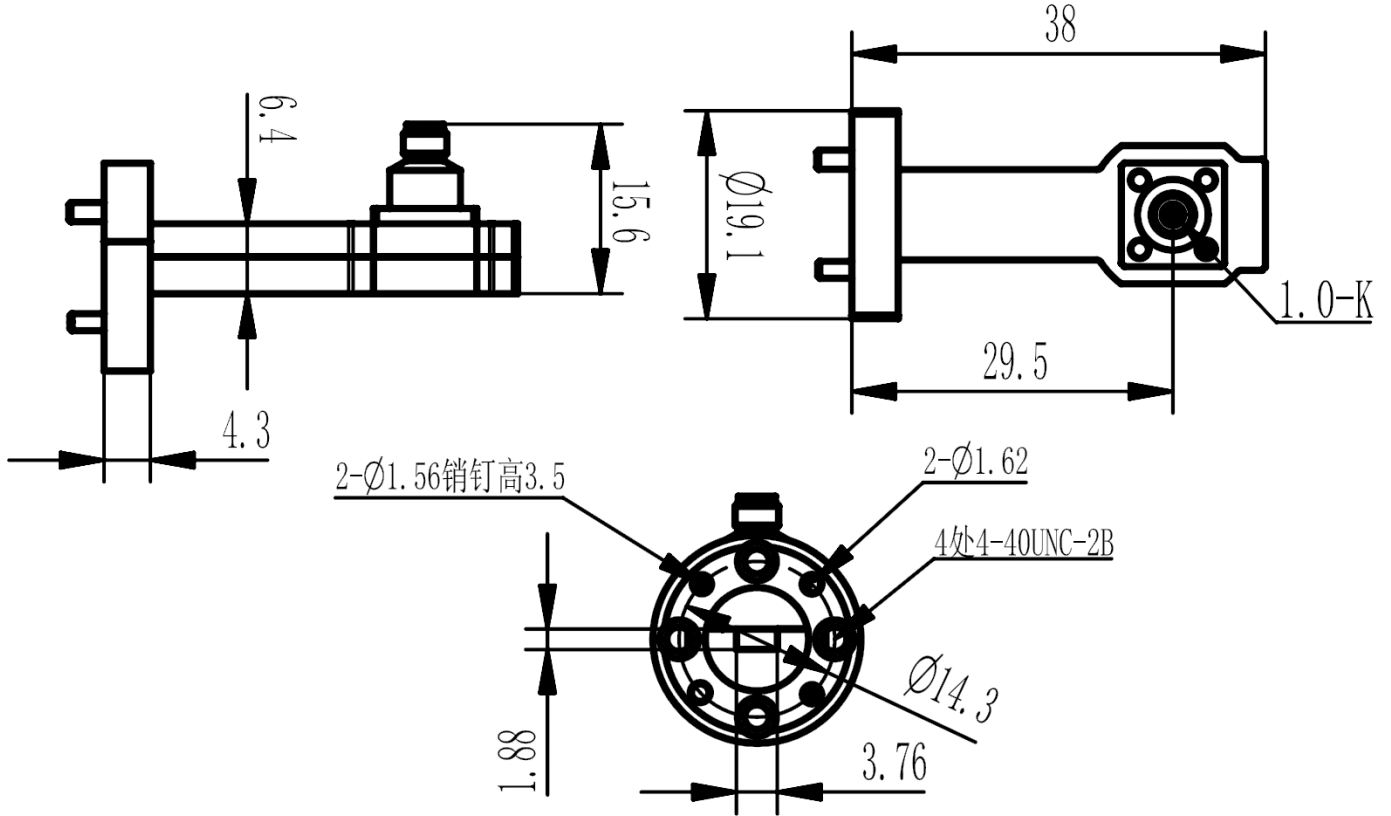

Electrical & Environmental

Frequency Range	50-75GHz	Impedance	50 ohm	VSWR	1.38 max
Input Avg Power	3W @25°C	Peak Power	-	Insertion Loss	1 dB max

Mechanical & Product Information

Product Number	RWR151, H-Grade	Body Geometry	Right Angle
Waveguide Body	Copper, gold plated	Waveguide	WR15, FUGP620 Circular Flange
Connector Body	Passivated stainless steel	Coax Connector	1.0mm Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-