




## APC-7 to 2.92mm(K,SK) Female, Adapter, RA18AP04 DC-18GHz, Straight

Dimensions(mm) Tolerance $\pm$ 1%

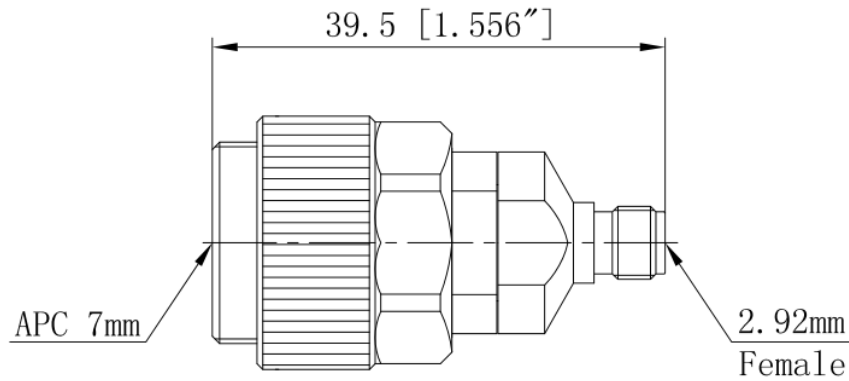

### Electrical & Environmental

<b>Frequency Range</b>	DC-18GHz	<b>Impedance</b>	50 ohm
<b>VSWR</b>	1.25 max	<b>Operating Temp</b>	-55°C to +165°C
<b>Insertion Loss</b>	0.30dB max		

### Mechanical & Product Information

<b>Product Number</b>	RA18AP04, E-Grade	<b>Connector</b>	APC-7 to 2.92mm(K,SK) Female
<b>Connector Body</b>	Passivated stainless steel	<b>Shape/Mounting</b>	Straight, None
<b>Center Contact</b>	Gold plated beryllium copper	<b>Insulator</b>	PEI

### Typical Test Data

