






Dimensions(mm) Tolerance±1%

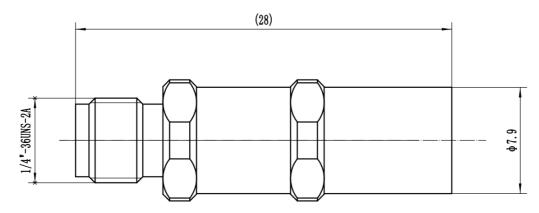

Electrical & Environmental

| Frequency Range | | DC-18GHz | Impedance | 50 ohm | |
|-----------------|--|----------|----------------|-----------------|--|
| VSWR | | 1.2 max | Operating Temp | -55°C to +165°C | |

Mechanical & Product Information

| Product Number | RA18B04, H-Grade | Connector | BMA Female to 3.5mm Female |
|----------------|---------------------------------|----------------|----------------------------|
| Connector Body | Passivated stainless steel 303F | Shape/Mounting | Straight, None |
| Center Contact | Gold plated beryllium copper | Insulator | PEI |

