


End Launch Waveguide to Coaxial Adapter, RWR284DE 2.6-3.95GHz, WR284 to L29 Female, UDR32 Flange

Dimensions(mm) Tolerance $\pm 1\%$

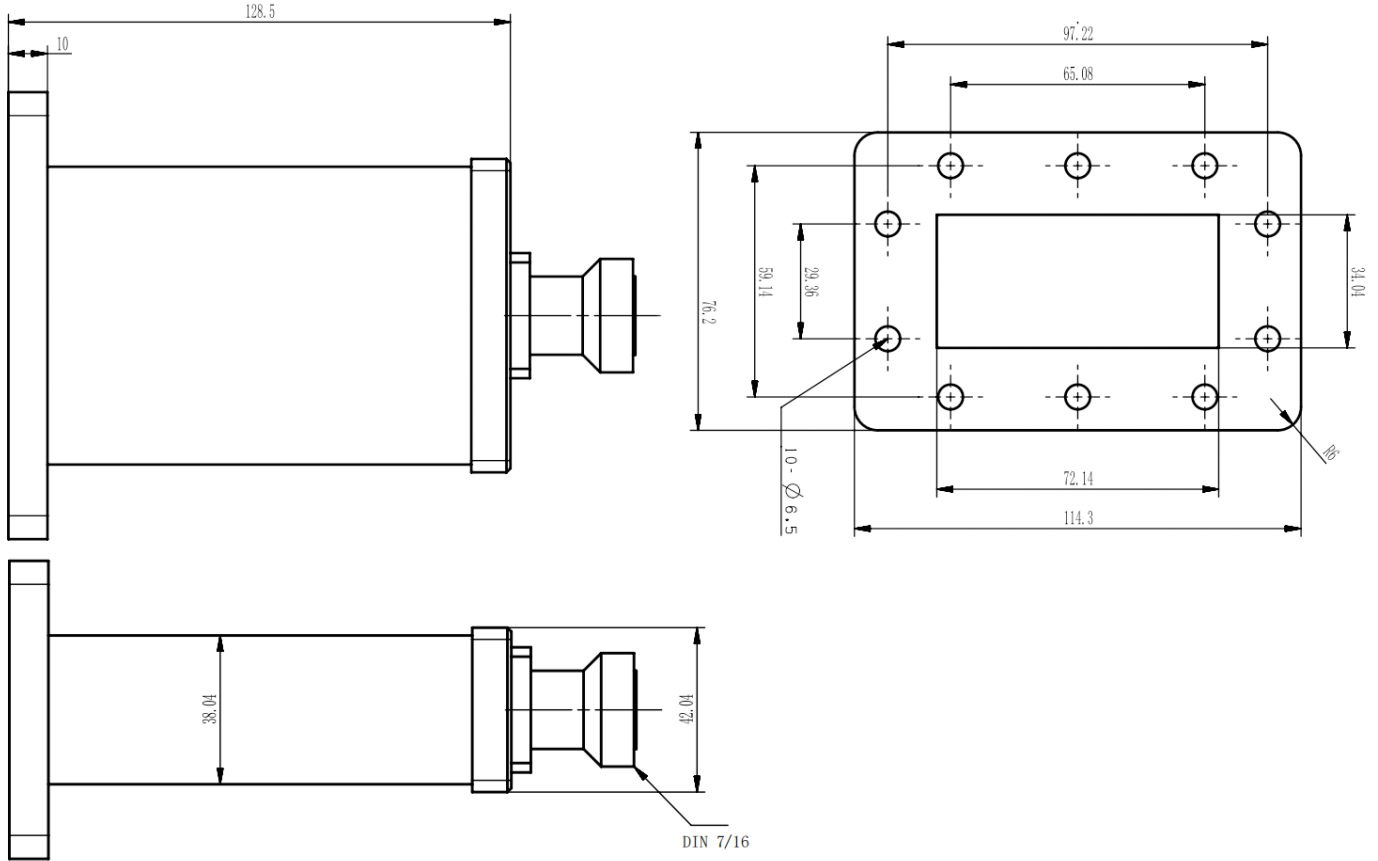

Electrical & Environmental

Frequency Range	2.6-3.95GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	1000W @25°C	Peak Power	-	Insertion Loss	0.3 dB max

Mechanical & Product Information

Product Number	RWR284DE, H-Grade	Body Geometry	End Launch
Waveguide Body	Aluminum, grey painted	Waveguide	WR284, UDR32 Flange
Connector Body	Nickel plated brass	Coax Connector	L29 Female
Center Contact	Silver plated phospher bronze		
Operating Temp	-40°C to 70°C	Net Weight	-