V1.0-2024219

N Female to N Female, Adapter, RA18N01FS
DC-18GHz, Straight, 4 hole flange

Dimensions(mm) Tolerance±1%

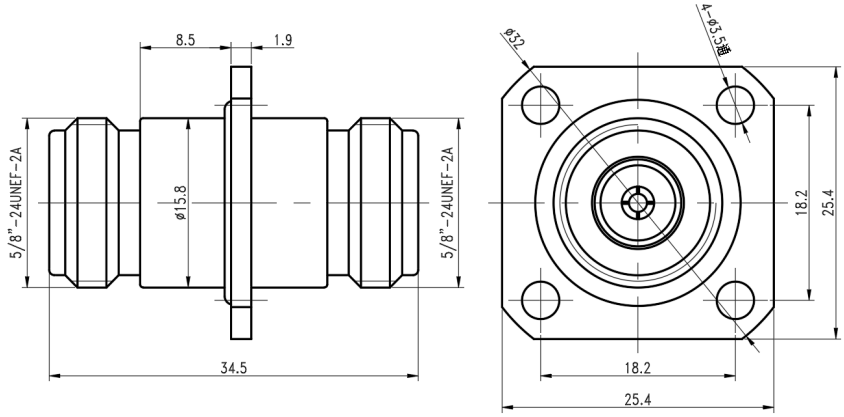

Electrical & Environmental

Frequency Range	DC-18GHz	**Impedance**	50 ohm
VSWR	1.2 max	**Operating Temp**	-55°C to +165°C
Insertion Loss	0.30dB max ≤0.1√f(GHz)dB		

Mechanical & Product Information

Product Number	RA18N01FS, JP-Grade, Sealing ring	**Connector**	N Female to N Female
Connector Body	Passivated stainless steel	**Shape/Mounting**	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	**Insulator**	PEI

Typical Test Data

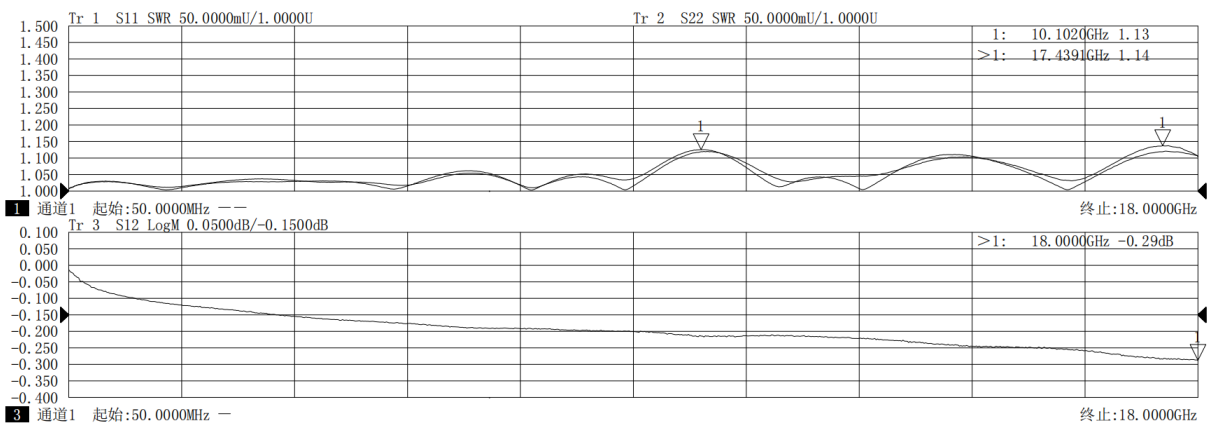

	扫描类型	起始频率	终止频率	扫描点数	中频带宽(Hz)	扫描时间(s)	端口1,2功率(dBm)
通道1	线性扫描	0.050000000GHz	18.000000000GHz	801	1000	0.757065	-5.0,-5.0