




## Right Angle Waveguide to Coaxial Adapter, RWR284N02 2.6-3.95GHz, WR284 to N Female, UDR32 Flange

Dimensions(mm) Tolerance $\pm 1\%$

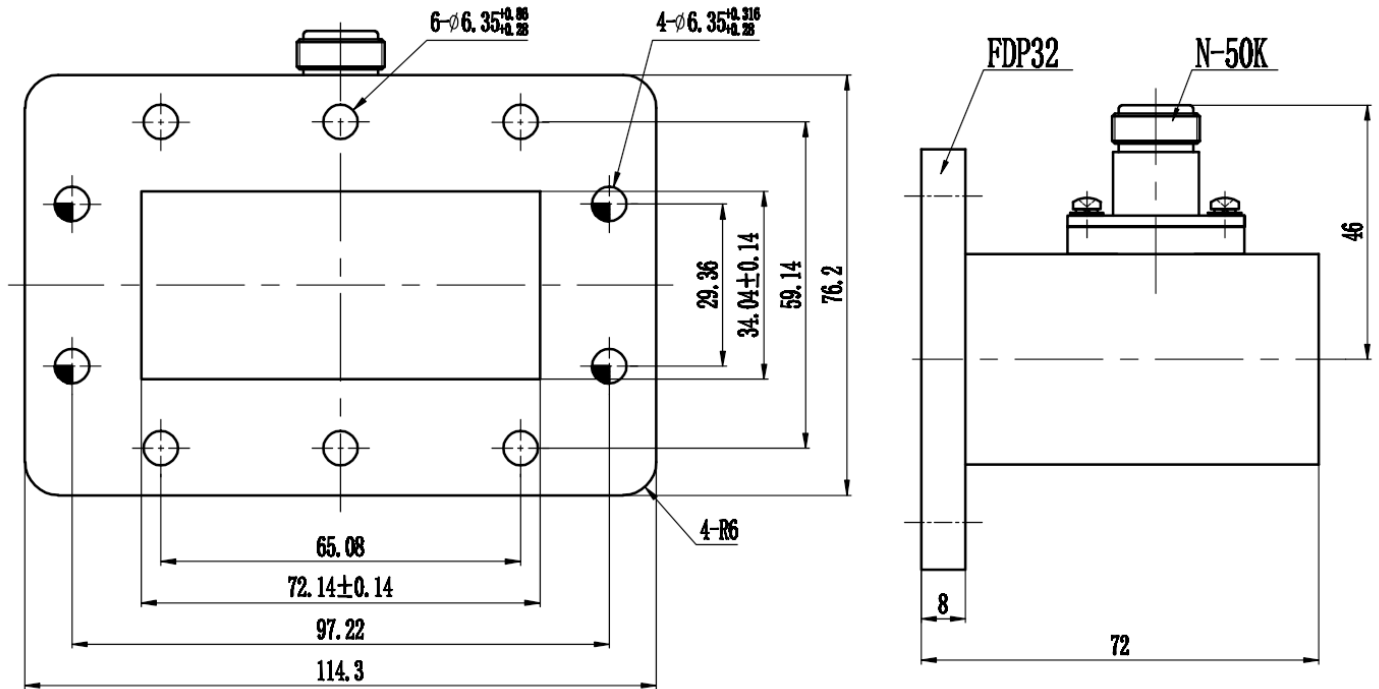

### Electrical & Environmental

Frequency Range	2.6-3.95GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	100W @25°C	Peak Power	-	Insertion Loss	0.2 dB max

### Mechanical & Product Information

Product Number	RWR284N02, E-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR284, UDR32 Flange
Connector Body	Nickel plated brass	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-20°C to 70°C	Net Weight	About 296.5g



**Right Angle Waveguide to Coaxial Adapter, RWR284N02**  
2.6-3.95GHz, WR284 to N Female, UDR32 Flange

**Typical Test Data**

