


N Male to SMA Male, Adapter, RA18N16-2 DC-18GHz, Straight

Dimensions(mm) Tolerance $\pm 1\%$

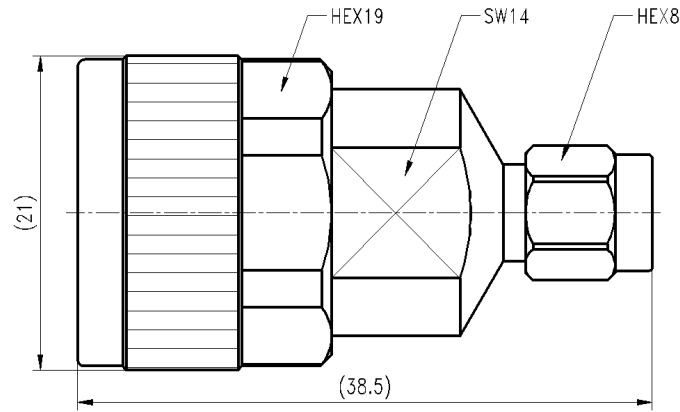

Electrical & Environmental

| | | | |
|------------------------|----------|-----------------------|-----------------|
| Frequency Range | DC-18GHz | Impedance | 50 ohm |
| VSWR | 1.15 max | Operating Temp | -55°C to +165°C |

Mechanical & Product Information

| | | | |
|-----------------------|---------------------------------|-----------------------|--------------------|
| Product Number | RA18N16-2, JP-Grade | Connector | N Male to SMA Male |
| Connector Body | Passivated stainless steel 316F | Shape/Mounting | Straight, None |
| Center Contact | 1.27um gold plated brass | Insulator | PEI&PTFE |

