


## N Male to SMA Male, Adapter, RA18N16-NBA DC-18GHz, Straight

### Dimensions(mm) Tolerance $\pm 1\%$

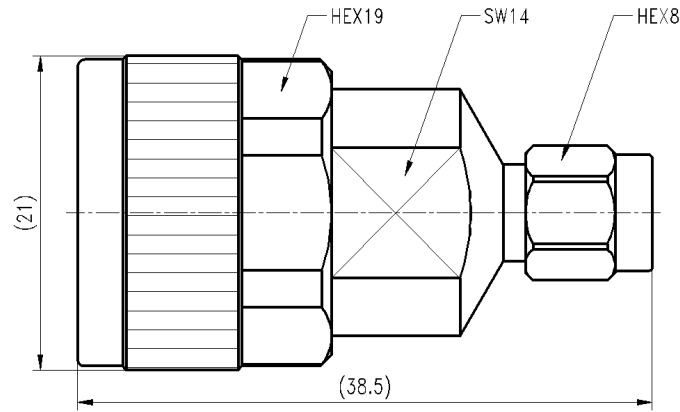

### Electrical & Environmental

|                        |          |                       |                 |
|------------------------|----------|-----------------------|-----------------|
| <b>Frequency Range</b> | DC-18GHz | <b>Impedance</b>      | 50 ohm          |
| <b>VSWR</b>            | 1.15 max | <b>Operating Temp</b> | -40°C to +155°C |

### Mechanical & Product Information

|                       |                       |                       |                    |
|-----------------------|-----------------------|-----------------------|--------------------|
| <b>Product Number</b> | RA18N16-NBA, JP-Grade | <b>Connector</b>      | N Male to SMA Male |
| <b>Connector Body</b> | Nickel plated brass   | <b>Shape/Mounting</b> | Straight, None     |
| <b>Center Contact</b> | Gold plated brass     | <b>Insulator</b>      | PEI&PTFE           |

