


Right Angle Waveguide to Coaxial Adapter, RWR28U 26.3-40GHz, WR28 to 2.4mm Female, UBR320 Flange

Dimensions(mm) Tolerance $\pm 1\%$

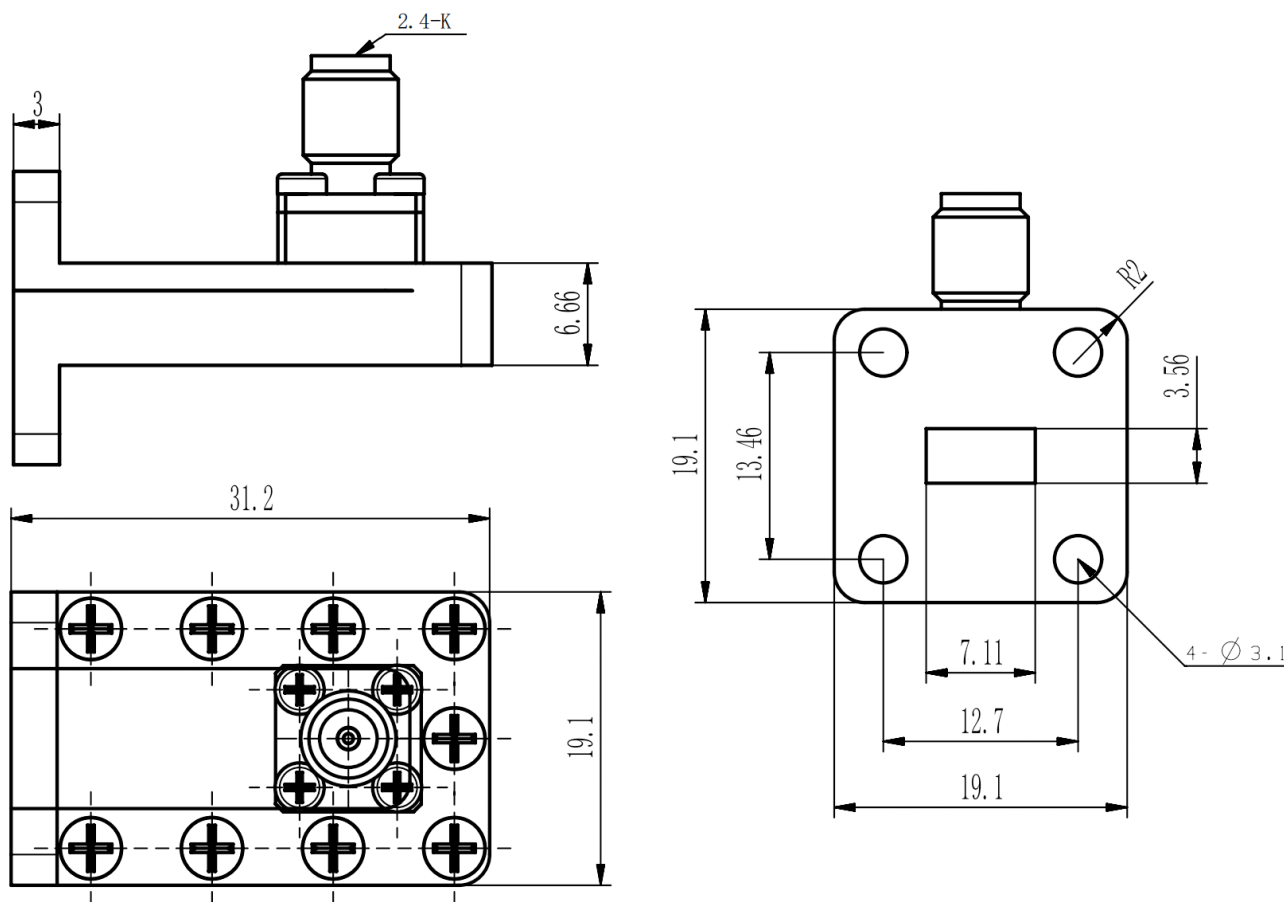

Electrical & Environmental

Frequency Range	26.3-40GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	10W @25°C	Peak Power	1000W	Insertion Loss	00.3 dB max

Mechanical & Product Information

Product Number	RWR28U, H-Grade	Body Geometry	Right Angle
Waveguide Body	Copper, grey painted	Waveguide	WR28, UBR320 Flange
Connector Body	Passivated stainless steel	Coax Connector	2.4mm Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-