




N Female to SMA Female, Adapter, RA18N19FSH DC-18GHz, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

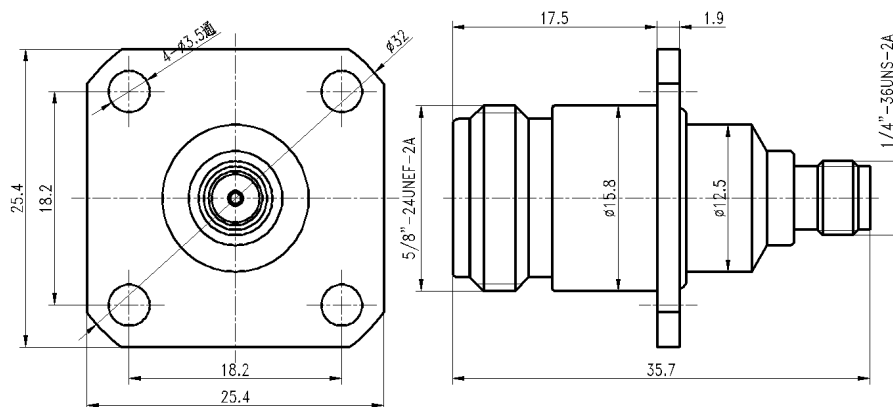

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18N19FSH, JP-Grade, Sealing ring	Connector	N Female to SMA Female
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE
Dimension	35.7(L)mm	Net Weight	-

Typical Test Data

