


Right Angle Waveguide to Coaxial Adapter, RWR4.31-9.57K 17-31GHz, BJ4.31-9.57 to 2.92mm Female,

Dimensions(mm) Tolerance $\pm 1\%$

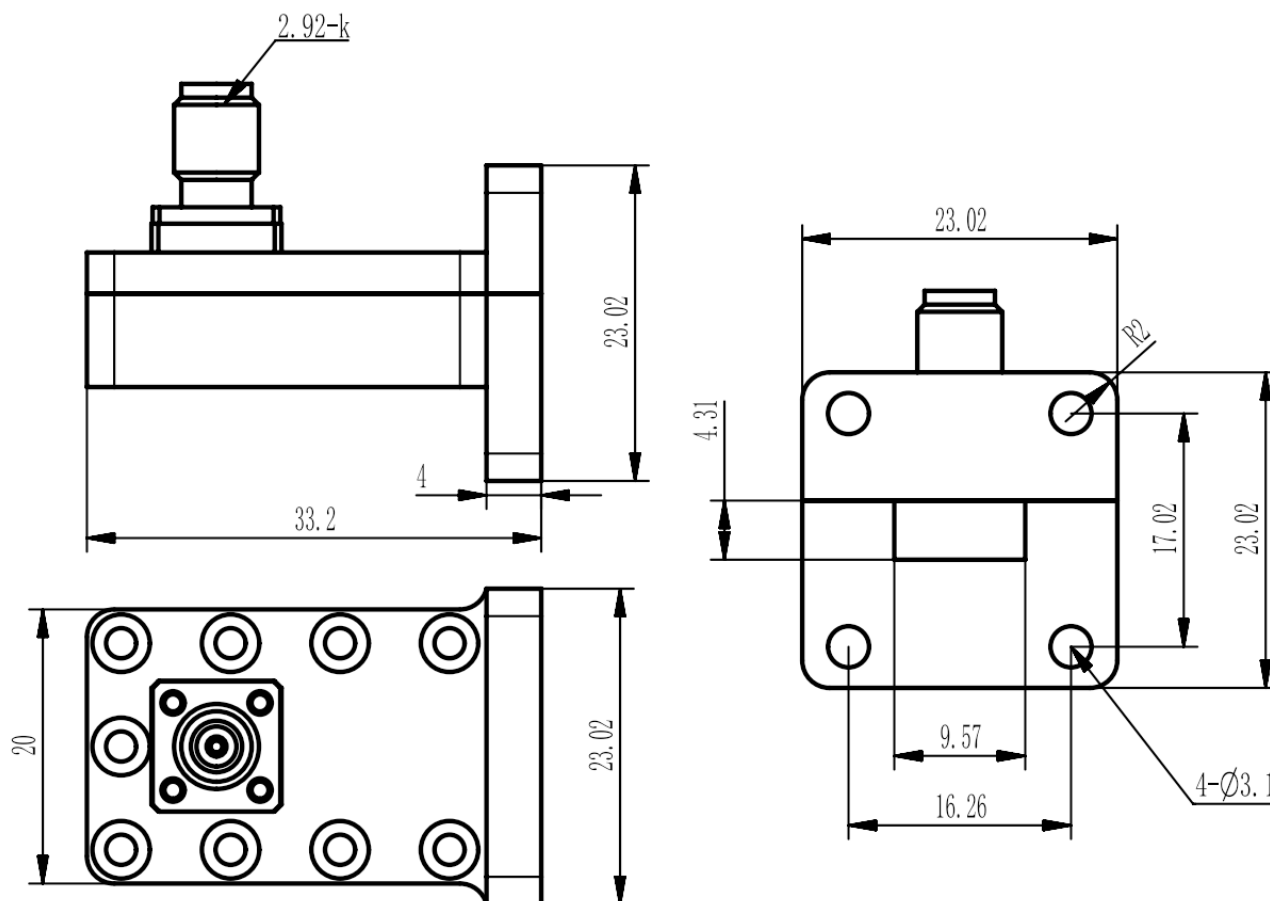

Electrical & Environmental

Frequency Range	17-31GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	10W @25°C	Peak Power	-	Insertion Loss	00.3 dB max

Mechanical & Product Information

Product Number	RWR4.31-9.57K, P-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	BJ4.31-9.57,
Connector Body	Passivated stainless steel	Coax Connector	2.92mm(K,SK) Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-