




Right Angle Waveguide to Coaxial Adapter, **RWR430S** 1.72-2.61GHz, WR430 to SMA Female, UDR22 Flange

Dimensions(mm) Tolerance $\pm 1\%$

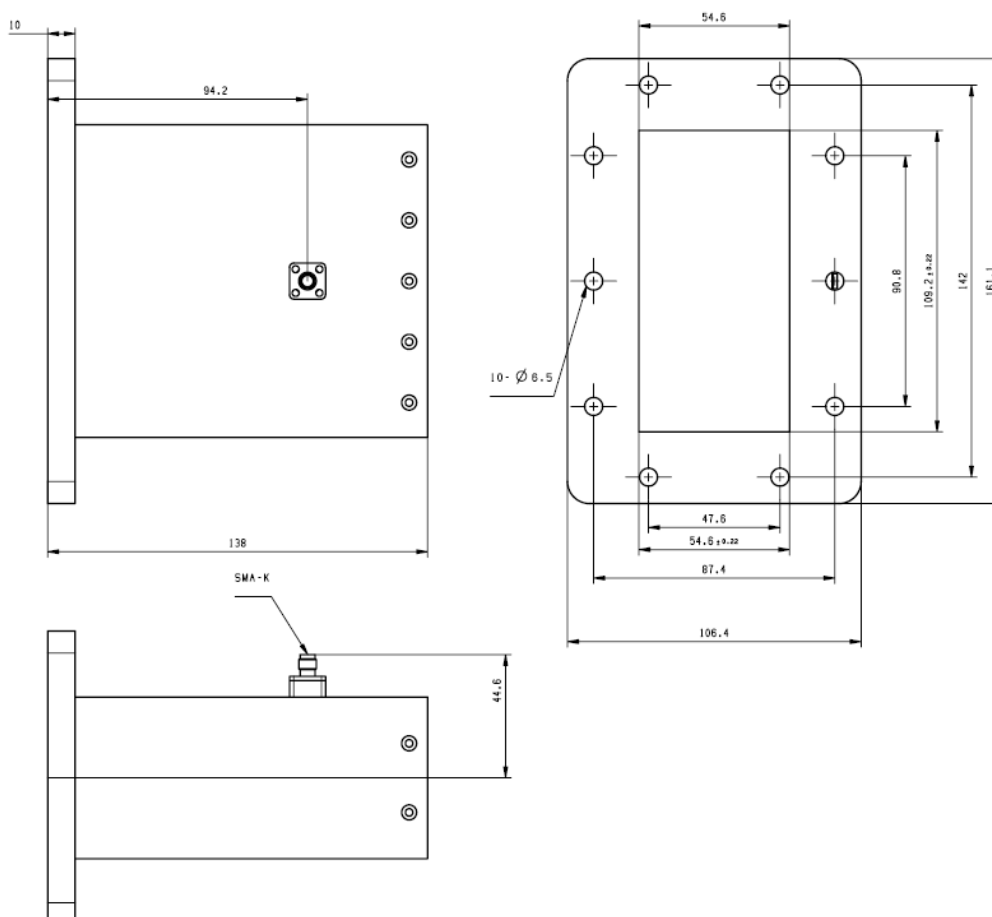

Electrical & Environmental

Frequency Range	1.72-2.61GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	100W @25°C	Peak Power	2000W	Insertion Loss	0.2 dB max

Mechanical & Product Information

Product Number	RWR430S, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR430, UDR22 Flange
Connector Body	Passivated stainless steel	Coax Connector	SMA Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 886.5g



Right Angle Waveguide to Coaxial Adapter, **RWR430S** 1.72-2.61GHz, WR430 to SMA Female, UDR22 Flange

Typical Test Data

