


Right Angle Waveguide to Coaxial Adapter, [RWR975N](#) 0.76-1.15GHz, WR975 to N Female, UDR9 Flange

Dimensions(mm) Tolerance $\pm 1\%$

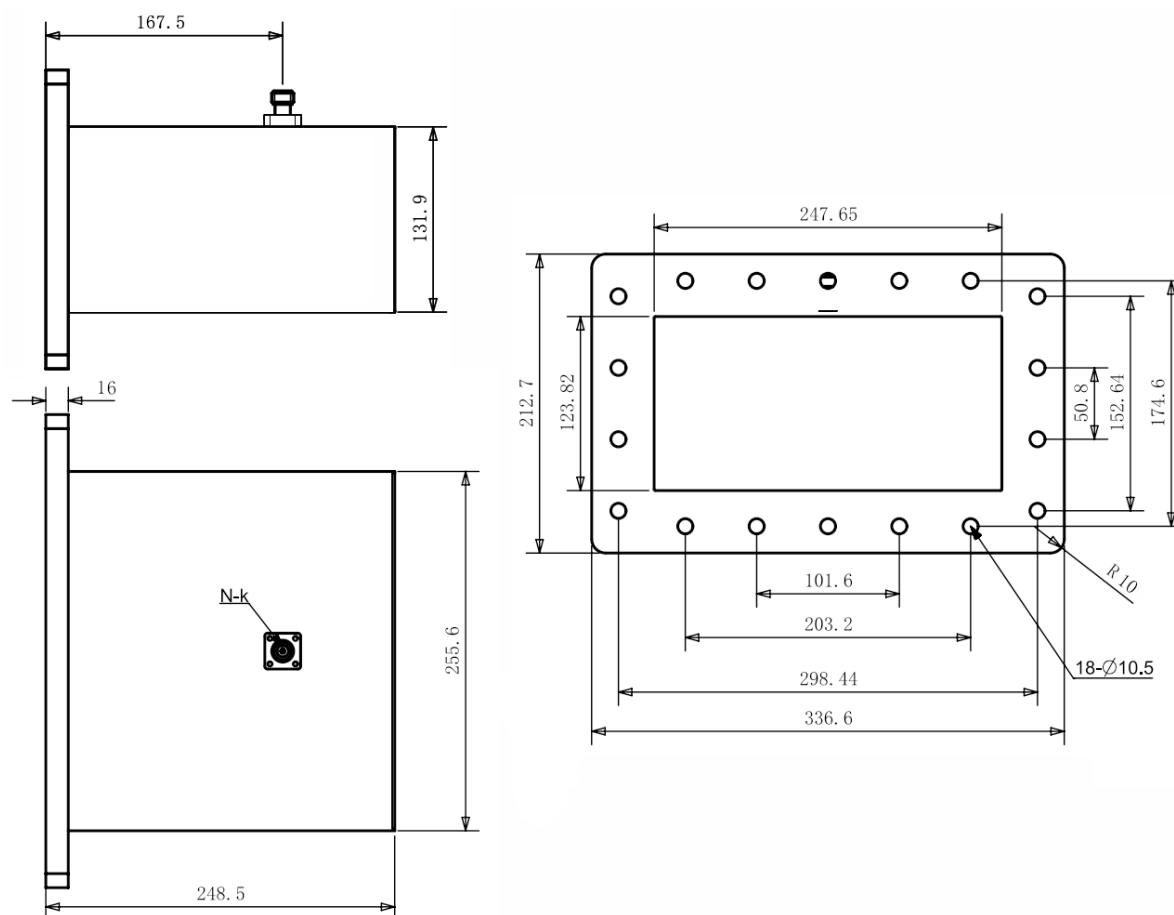


Electrical & Environmental

Frequency Range	0.76-1.15GHz	Impedance	50 ohm	VSWR	1.2 max
Input Avg Power	2000W @25°C	Peak Power	-	Insertion Loss	00.15 dB max

Mechanical & Product Information

Product Number	RWR975N, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WR975, UDR9 Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	1.27μm Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	About 5.5kg



Right Angle Waveguide to Coaxial Adapter, **RWR975N** 0.76-1.15GHz, WR975 to N Female, UDR9 Flange

Typical Test Data

