




## SMA Female to SMA Female, Adapter, RA18S01F-GBA DC-18GHz, Straight, 4 hole flange

### Dimensions(mm) Tolerance $\pm 1\%$

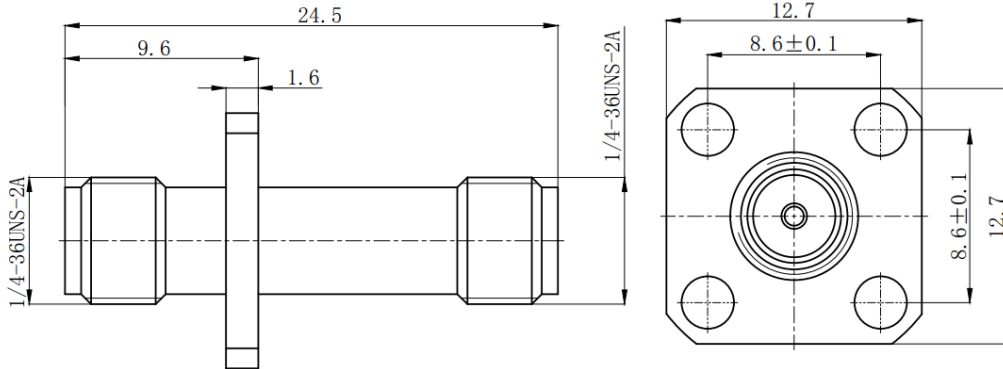

### Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.25 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.20dB max		

### Mechanical & Product Information

Product Number	RA18S01F-GBA, E-Grade	Connector	SMA Female to SMA Female
Connector Body	Gold plated brass	Shape/Mounting	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	Insulator	PTFE

### Typical Test Data

