


End Launch Double Ridge Waveguide to Coax Adapter, **RWRD110SE** 11-26.5GHz, WRD110 to SMA Female, FPWRD110 Rectangular Flange

Dimensions(mm) Tolerance $\pm 1\%$

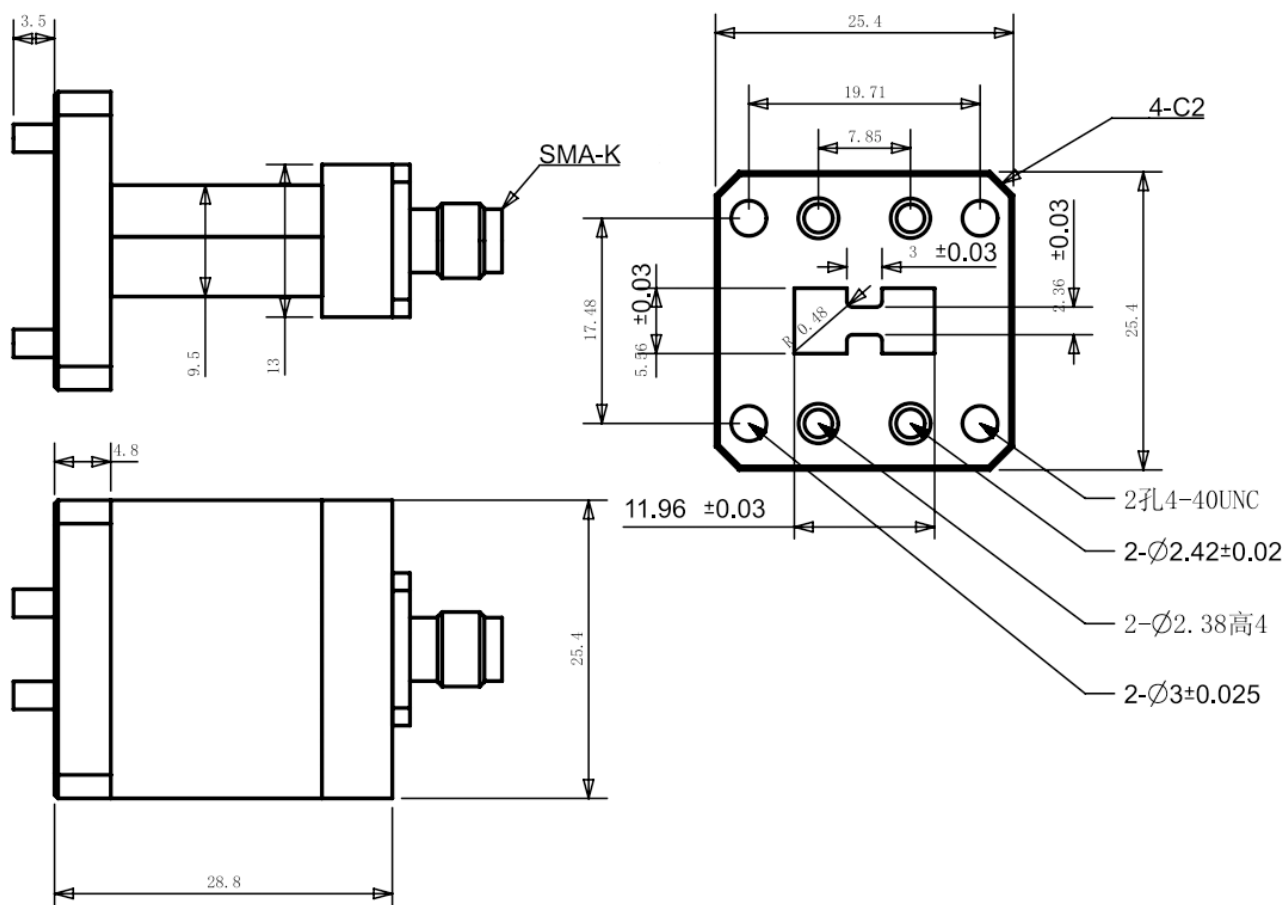

Electrical & Environmental

Frequency Range	11-26.5GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	20W @25°C	Peak Power	2000W	Insertion Loss	0.7 dB max

Mechanical & Product Information

Product Number	RWRD110SE, H-Grade	Body Geometry	End Launch
Waveguide Body	Aluminum, grey painted	Waveguide	WRD110, FPWRD110 Rectangular Flange
Connector Body	Passivated stainless steel	Coax Connector	SMA Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-