


Right Angle Double Ridge Waveguide to Coax Adapter, **RWRD18024** 18-40GHz, WRD180 to 2.4mm Female, FPWRD180 Rectangular Flange

Dimensions(mm) Tolerance $\pm 1\%$

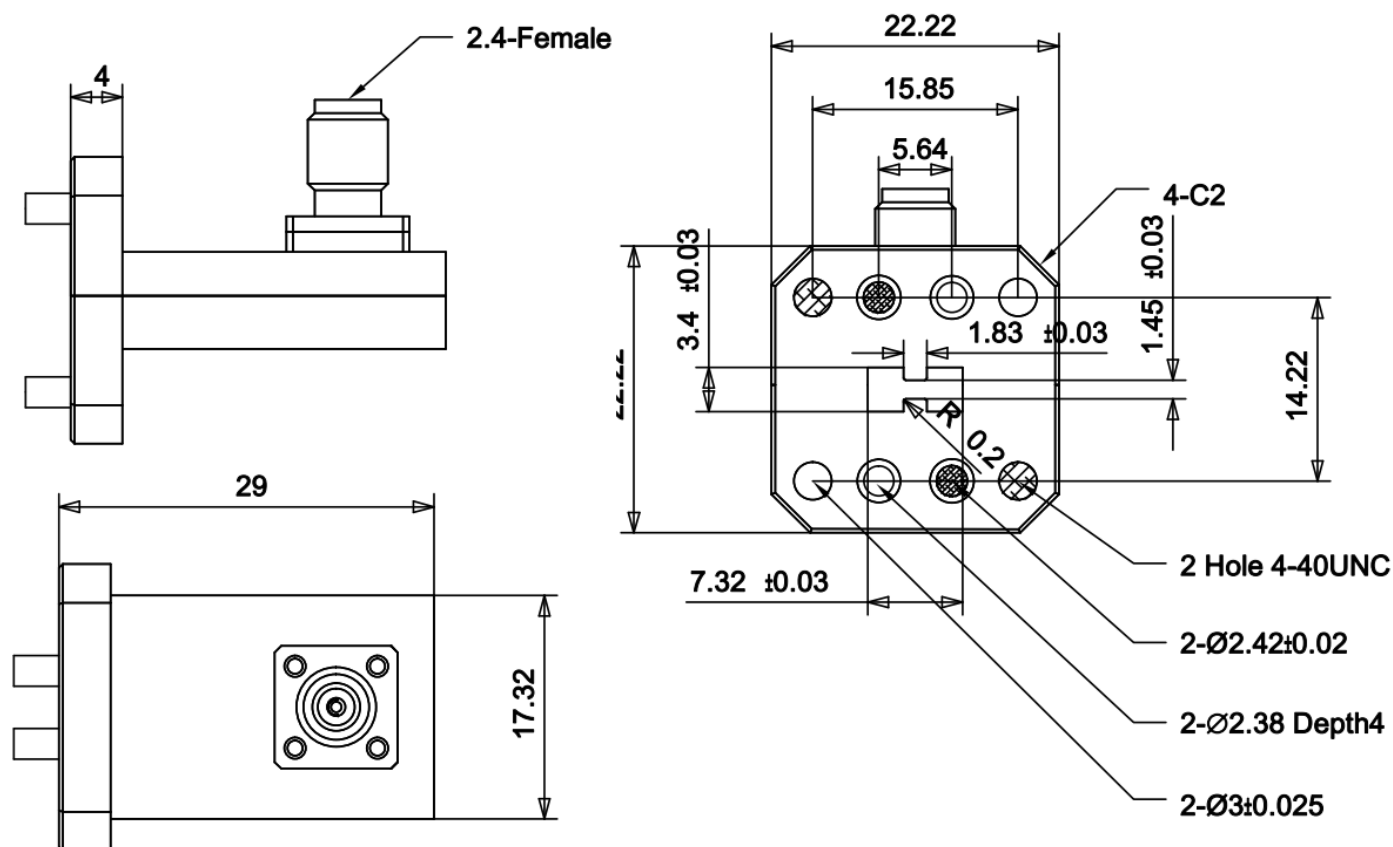

Electrical & Environmental


Frequency Range	18-40GHz	Impedance	50 ohm	VSWR	1.4 max
Input Avg Power	15W @25°C	Peak Power	3000W	Insertion Loss	0.7 dB max

Mechanical & Product Information

Product Number	RWRD18024, H-Grade	Body Geometry	Right Angle
Waveguide Body	Aluminum, grey painted	Waveguide	WRD180, FPWRD180 Rectangular Flange
Connector Body	Passivated stainless steel	Coax Connector	2.4mm Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-

Right Angle Double Ridge Waveguide to Coax Adapter, **RWRD18024** WRD180 to 2.4mm Female, FPWRD180 Rectangular Flange

Typical Test Data

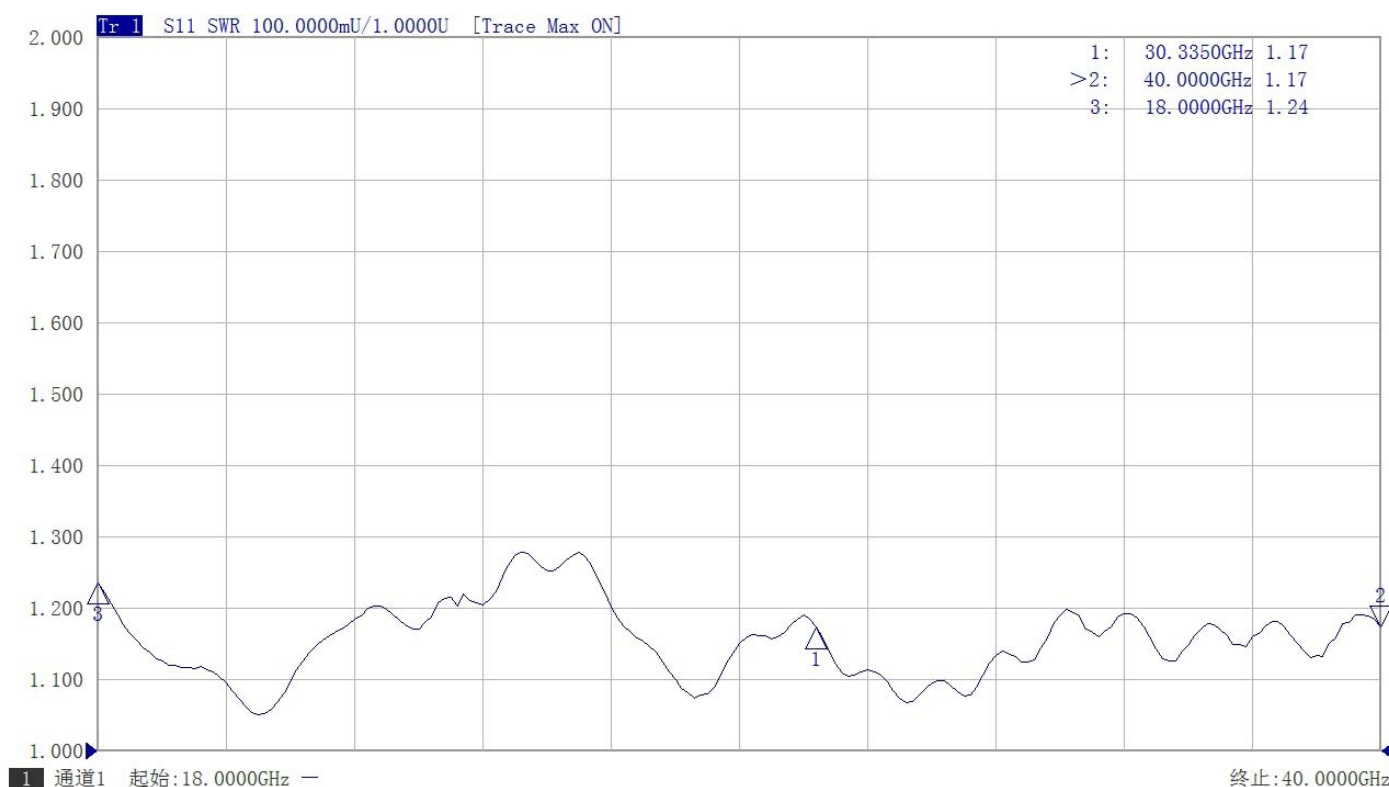



Microwave and Millimeter wave products
supplier

RFTOP® Technology Co., Ltd.
www.rftop.com service@rftop.com [86-755-88840350](tel:86-755-88840350)