


End Launch Double Ridge Waveguide to Coax Adapter, RWRD350NE WRD350 to N Female, FPWRD350 Rectangular Flange

Dimensions(mm) Tolerance $\pm 1\%$

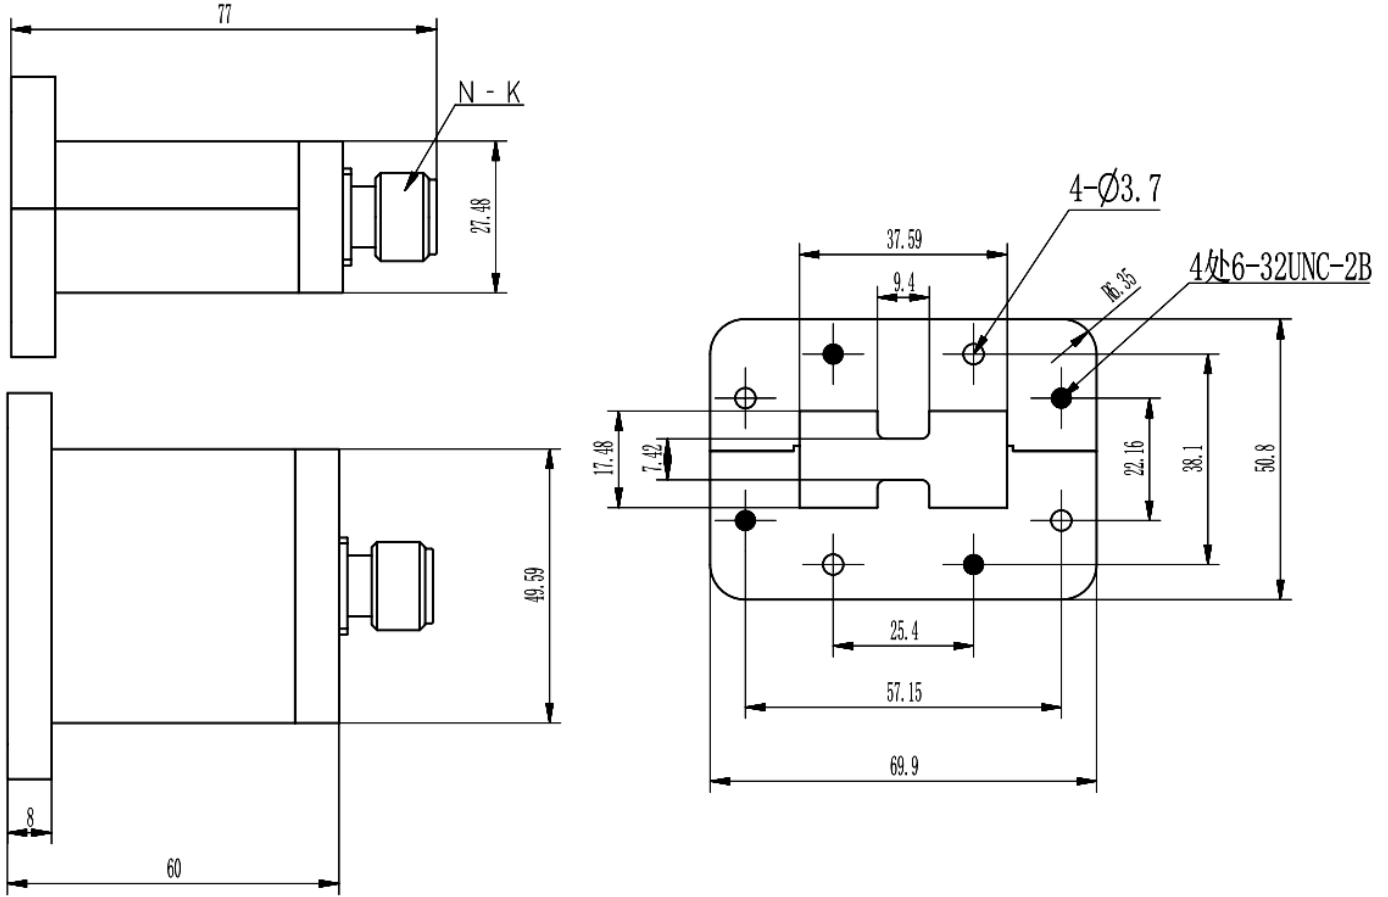

Electrical & Environmental

Frequency Range	3.5-8.2GHz	Impedance	50 ohm	VSWR	1.25 max
Input Avg Power	150W @25°C	Peak Power	3000W	Insertion Loss	0.35 dB max

Mechanical & Product Information

Product Number	RWRD350NE, H-Grade	Body Geometry	End Launch
Waveguide Body	Aluminum, grey painted	Waveguide	WRD350, FPWRD350 Rectangular Flange
Connector Body	Passivated stainless steel	Coax Connector	N Female
Center Contact	Gold plated beryllium copper		
Operating Temp	-40°C to 70°C	Net Weight	-