


SMA Female to SMA Female, Adapter, RA18S01YH02 DC-26.5GHz, Bulkhead



Dimensions(mm) Tolerance $\pm 1\%$

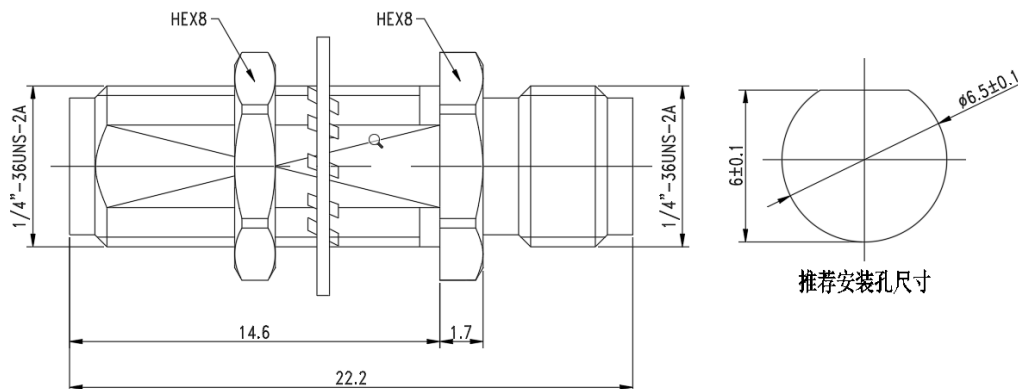

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max (18-26.5GHz); 1.15 max (DC-18GHz)	Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18S01YH02, JP-Grade	Connector	SMA Female to SMA Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, Bulkhead
Center Contact	1.27um gold plated beryllium copper	Insulator	PTFE
Dimension	22.2(L)mm	Net Weight	About 3.5g

Typical Test Data

