




QSMA Male to SMA Male, Adapter, RA18S02Q DC-18GHz, Straight, Quick Plug

Dimensions(mm) Tolerance±1%

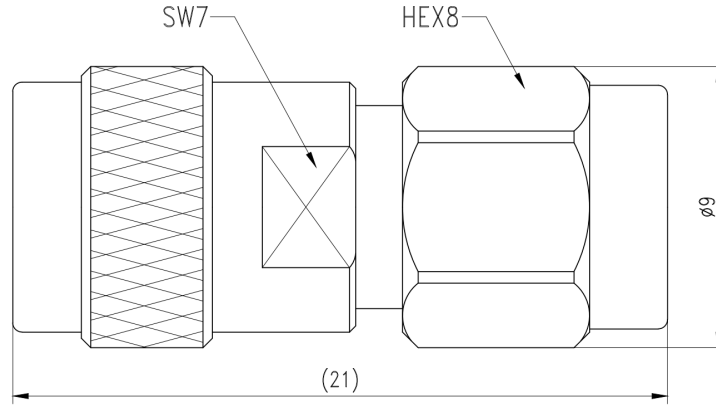

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max	Operating Temp	-55°C to +165°C
Insertion Loss	0.20dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB		

Mechanical & Product Information

Product Number	RA18S02Q, JP-Grade	Connector	QSMA Male to SMA Male
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, Quick Plug
Center Contact	Gold plated brass	Insulator	PTFE

Typical Test Data

