




SMA Male to SMA Female, Adapter, RA18S03FH-GBA DC-18GHz, 4 hole flange

Dimensions(mm) Tolerance $\pm 1\%$

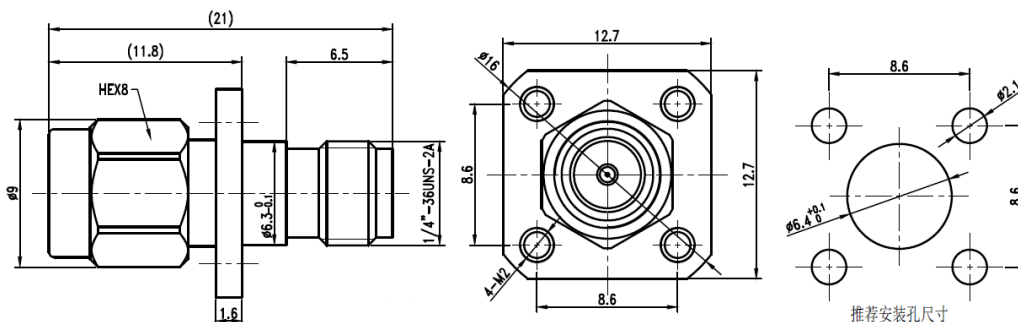

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.08dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18S03FH-GBA, H-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel/Gold plated brass	Shape/Mounting	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	21(L)mm	Net Weight	-

Typical Test Data

