




SMA Male to SMA Female, Adapter, RA18S03H-GBA DC-26.5GHz

Dimensions(mm) Tolerance $\pm 1\%$

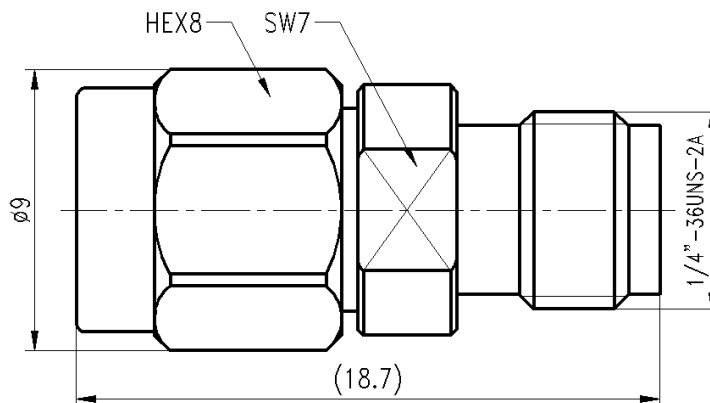

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.15 max	Insertion Loss	0.08dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18S03H-GBA, H-Grade	Connector	SMA Male to SMA Female
Connector Body	Gold plated brass	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PTFE
Dimension	18.7(L)*9(ϕ)mm	Net Weight	-

Typical Test Data

