




SMA Male to SMA Female, Adapter, RA18S03H DC-26.5GHz

Dimensions(mm) Tolerance $\pm 1\%$

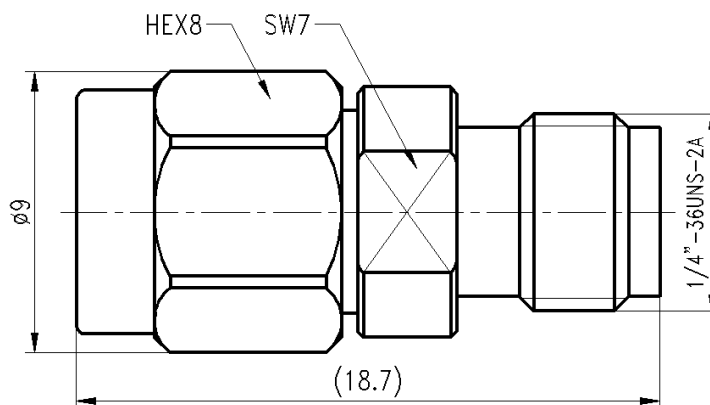

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max (18-26.5GHz); 1.15 max (DC-18GHz)	Insertion Loss	-

Mechanical & Product Information

Product Number	RA18S03H, JP-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, None
Center Contact	1.27um gold plated beryllium copper	Insulator	PTFE
Dimension	18.7(L)*9(ϕ)mm	Net Weight	About 3.6g

Typical Test Data

