




SMA Male to SMA Female, Adapter, RA18S03YH DC-26.5GHz, Bulkhead

Dimensions(mm) Tolerance $\pm 1\%$

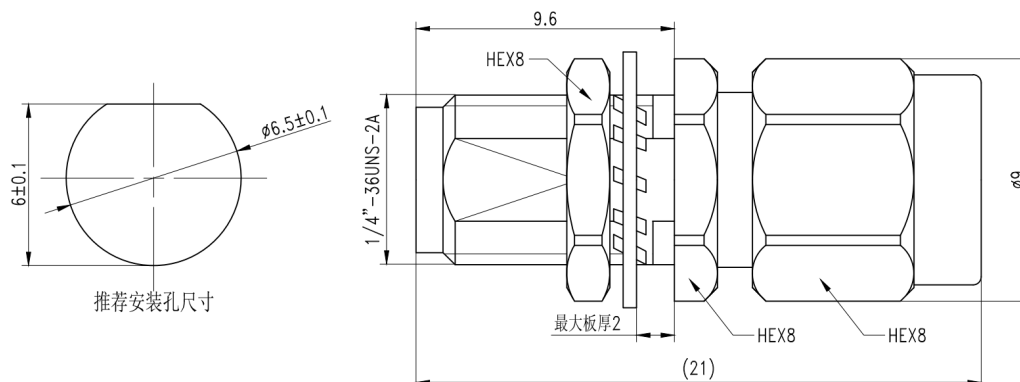

Electrical & Environmental

Frequency Range	DC-26.5GHz	Impedance	50 ohm
VSWR	1.2 max , Typ 1.1	Insertion Loss	0.10dB max $\leq 0.04\sqrt{f(\text{GHz})}$ dB

Mechanical & Product Information

Product Number	RA18S03YH, U-Grade	Connector	SMA Male to SMA Female
Connector Body	Passivated stainless steel 316F	Shape/Mounting	Straight, Bulkhead
Center Contact	1.27 μ m gold plated beryllium copper	Insulator	PTFE
Dimension	21(L)*9(ϕ)mm	Net Weight	-

Typical Test Data

