


## SMA Male to SMP(GPO) Male Limited Detent, Adapter, RA18S08H DC-26.5GHz

### Dimensions(mm) Tolerance $\pm 1\%$

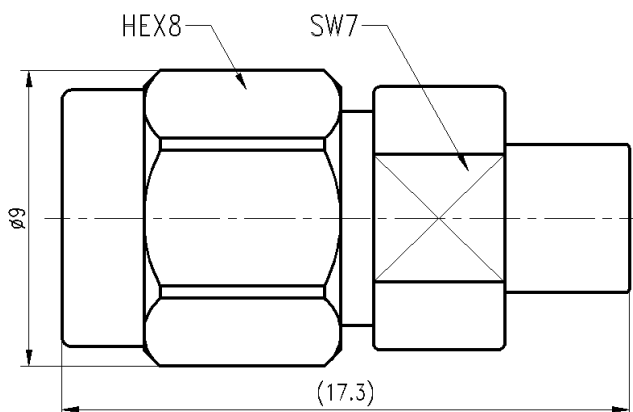

### Electrical & Environmental

|                 |                                           |                |        |
|-----------------|-------------------------------------------|----------------|--------|
| Frequency Range | DC-26.5GHz                                | Impedance      | 50 ohm |
| VSWR            | 1.2 max (18-26.5GHz); 1.15 max (DC-18GHz) | Insertion Loss | -      |

### Mechanical & Product Information

|                |                                     |                |                                          |
|----------------|-------------------------------------|----------------|------------------------------------------|
| Product Number | RA18S08H, JP-Grade                  | Connector      | SMA Male to SMP(GPO) Male Limited Detent |
| Connector Body | Passivated stainless steel 316F     | Shape/Mounting | Straight, None                           |
| Center Contact | 1.27um gold plated beryllium copper | Insulator      | PTFE                                     |
| Dimension      | 17.3(L)*9(φ)mm                      | Net Weight     | -                                        |