




## SMA Female to SMP(GPO) Female, Adapter, RA18S11FH-GBC DC-18GHz, 2 hole flange

### Dimensions(mm) Tolerance $\pm 1\%$

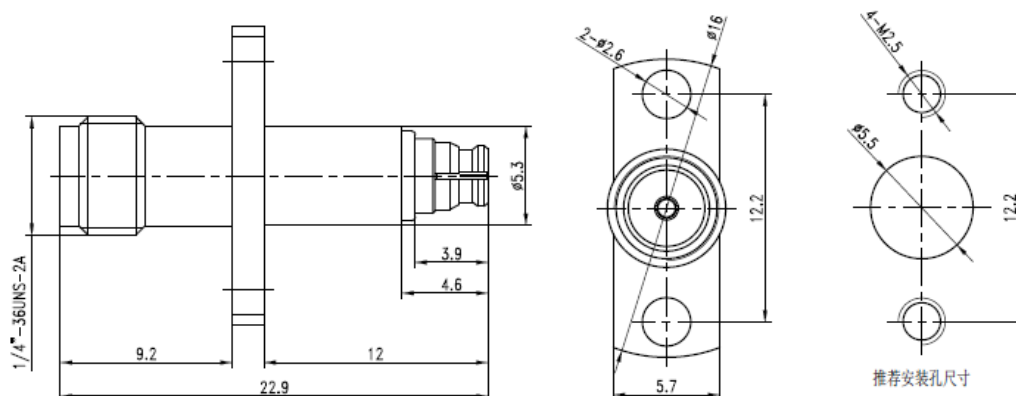

### Electrical & Environmental

|                 |                   |                |                                               |
|-----------------|-------------------|----------------|-----------------------------------------------|
| Frequency Range | DC-18GHz          | Impedance      | 50 ohm                                        |
| VSWR            | 1.3 max , Typ 1.1 | Insertion Loss | 0.20dB max $\leq 0.05\sqrt{f(\text{GHz})}$ dB |

### Mechanical & Product Information

|                |                              |                |                               |
|----------------|------------------------------|----------------|-------------------------------|
| Product Number | RA18S11FH-GBC, U-Grade       | Connector      | SMA Female to SMP(GPO) Female |
| Connector Body | Gold plated beryllium copper | Shape/Mounting | Straight, 2 hole flange       |
| Center Contact | Gold plated beryllium copper | Insulator      | PTFE                          |
| Dimension      | 22.9(L)mm                    | Net Weight     | About 3.2g                    |

### Typical Test Data

