




## SMA Female to SMP(GPO) Female, Adapter, RA18S11 DC-18GHz

### Dimensions(mm) Tolerance $\pm 1\%$

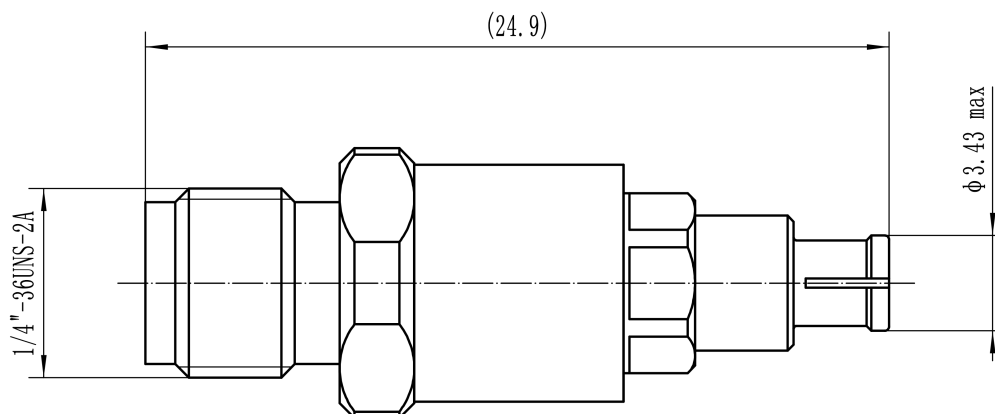

### Electrical & Environmental

|                 |          |                |        |
|-----------------|----------|----------------|--------|
| Frequency Range | DC-18GHz | Impedance      | 50 ohm |
| VSWR            | 1.25 max | Insertion Loss | -      |

### Mechanical & Product Information

|                |                                   |                |                               |
|----------------|-----------------------------------|----------------|-------------------------------|
| Product Number | RA18S11, H-Grade                  | Connector      | SMA Female to SMP(GPO) Female |
| Connector Body | Passivated stainless steel & BeCu | Shape/Mounting | Straight, None                |
| Center Contact | Gold plated beryllium copper      | Insulator      | PEI&PTFE                      |
| Dimension      | 24.9(L)mm                         | Net Weight     | -                             |

### Typical Test Data

