




## SMA Male to SSMP Male Full Detent, Adapter, RA18S12 DC-18GHz

### Dimensions(mm) Tolerance $\pm 1\%$

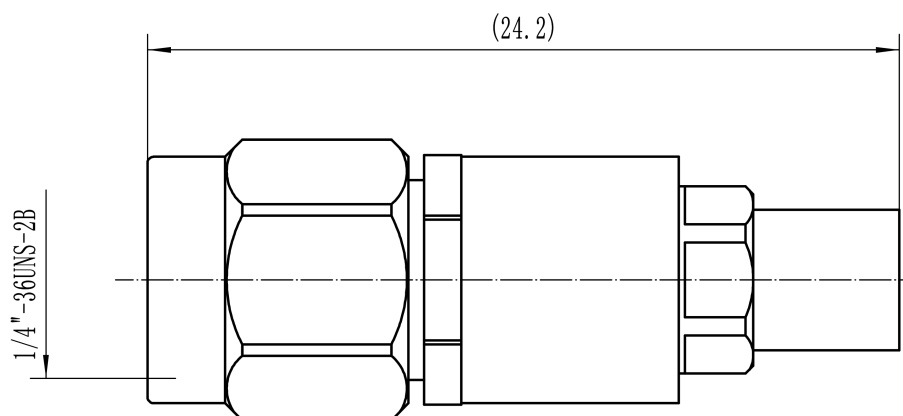

### Electrical & Environmental

|                 |          |                |        |
|-----------------|----------|----------------|--------|
| Frequency Range | DC-18GHz | Impedance      | 50 ohm |
| VSWR            | 1.2 max  | Insertion Loss | -      |

### Mechanical & Product Information

|                |                              |                |                                   |
|----------------|------------------------------|----------------|-----------------------------------|
| Product Number | RA18S12, H-Grade             | Connector      | SMA Male to SSMP Male Full Detent |
| Connector Body | Passivated stainless steel   | Shape/Mounting | Straight, None                    |
| Center Contact | Gold plated beryllium copper | Insulator      | PEI                               |
| Dimension      | 24.2(L)mm                    | Net Weight     | -                                 |

### Typical Test Data

