




## SMA Female to SSMP Female, Adapter, RA18S15 DC-18GHz, Straight

### Dimensions(mm) Tolerance $\pm 1\%$

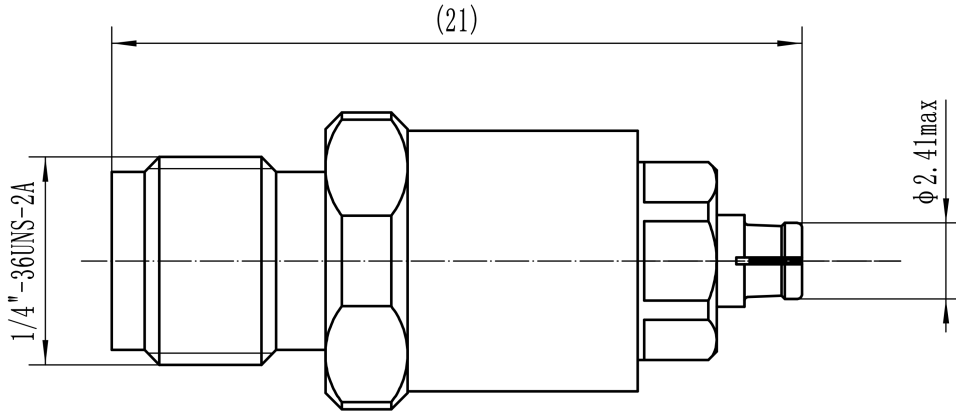

### Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.2 max	Operating Temp	-55°C to +165°C

### Mechanical & Product Information

Product Number	RA18S15, H-Grade	Connector	SMA Female to SSMP Female
Connector Body	Passivated stainless steel & BeCu	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI

### Typical Test Data

