




SMA Female to 2.92mm(K,SK) Male, Adapter, RA18S22
DC-18GHz, Straight

Dimensions(mm) Tolerance±1%

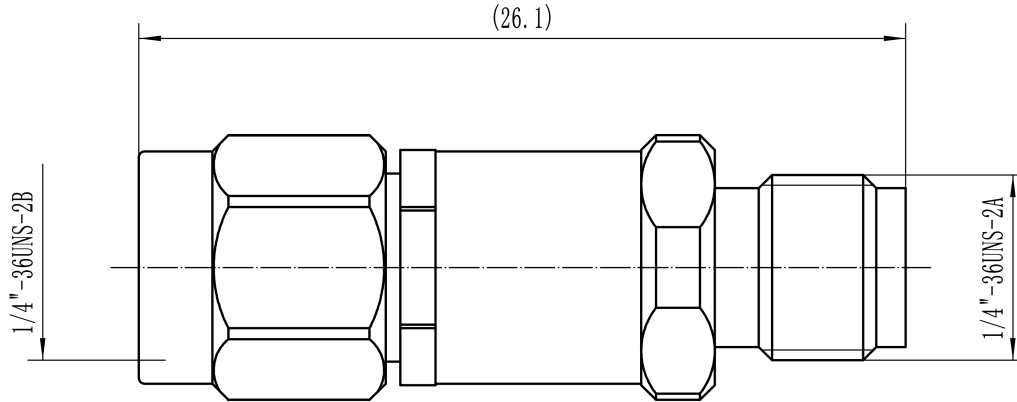

Electrical & Environmental

Frequency Range	DC-18GHz	Impedance	50 ohm
VSWR	1.15 max	Operating Temp	-55°C to +165°C

Mechanical & Product Information

Product Number	RA18S22, H-Grade	Connector	SMA Female to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel	Shape/Mounting	Straight, None
Center Contact	Gold plated beryllium copper	Insulator	PEI&PTFE

Typical Test Data

